

LED line




IP
66

IK
10



RANGER



PZH
PRODUKT Z ATTESTEM
NrBK/K/0875/01/2018

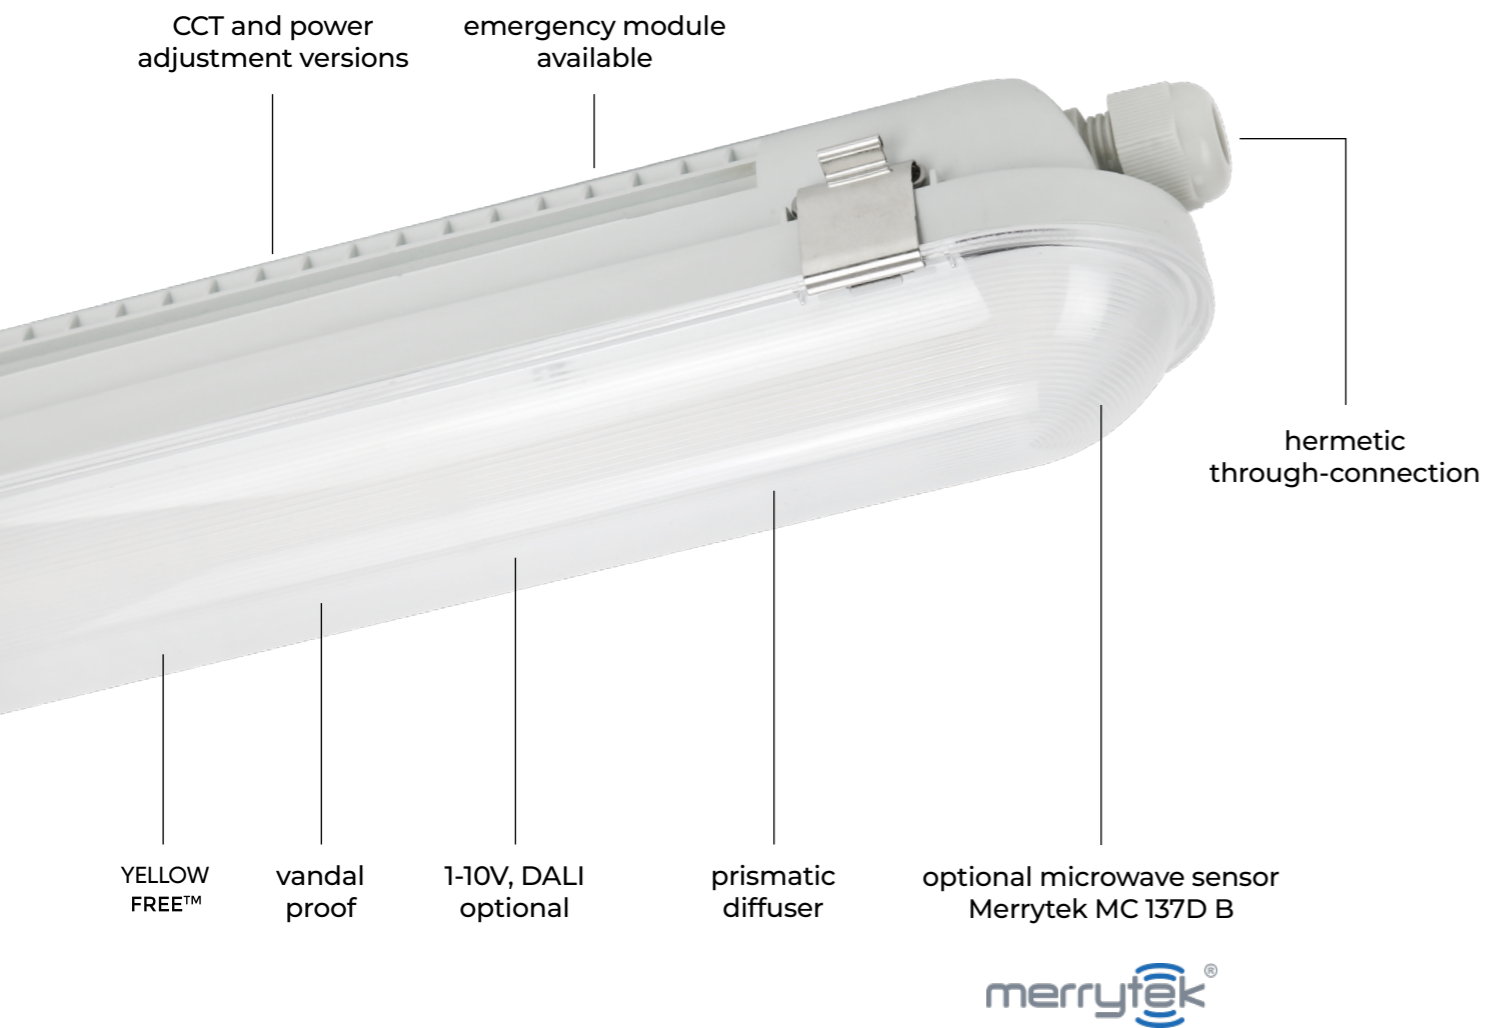

RANGER

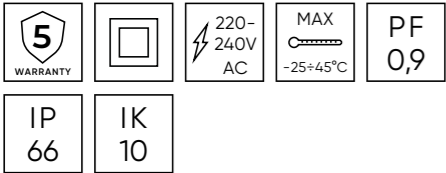

EFFICACY
150-180 lm/w

Power [W]:
10-80

Luminous flux [lm]:
5600-14400

Beam angle [°]:
120

Colour temperature [K]:



Lifetime [h]:
L70B50 - 100.000

Housing:
polycarbonate



Designed for extreme conditions


Our IP66 & IK10-rated luminaire RANGER is designed to withstand the harshest conditions. With complete protection against dust and powerful water jets (IP66) and high-impact resistance (IK10), it ensures reliable performance in demanding environments.

Ideal for industrial facilities, warehouses, parking garages, and outdoor applications, RANGER guarantees exceptional durability, safety, and efficiency even in the toughest conditions.



One luminaire, many possibilities


The RANGER hermetic luminaire has been equipped with a clip system, allowing quick and tool-free opening. This gives the user easy access to the interior, making it much easier to replace the power supply and install control systems such as DALI or emergency modules.

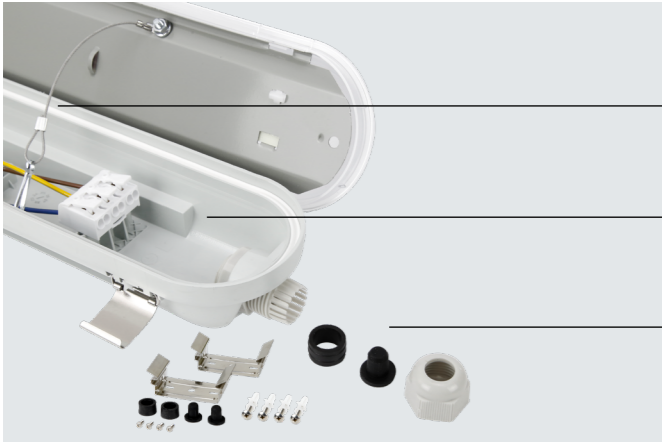

steel support
cable

space for control
systems


through-connection
coupling

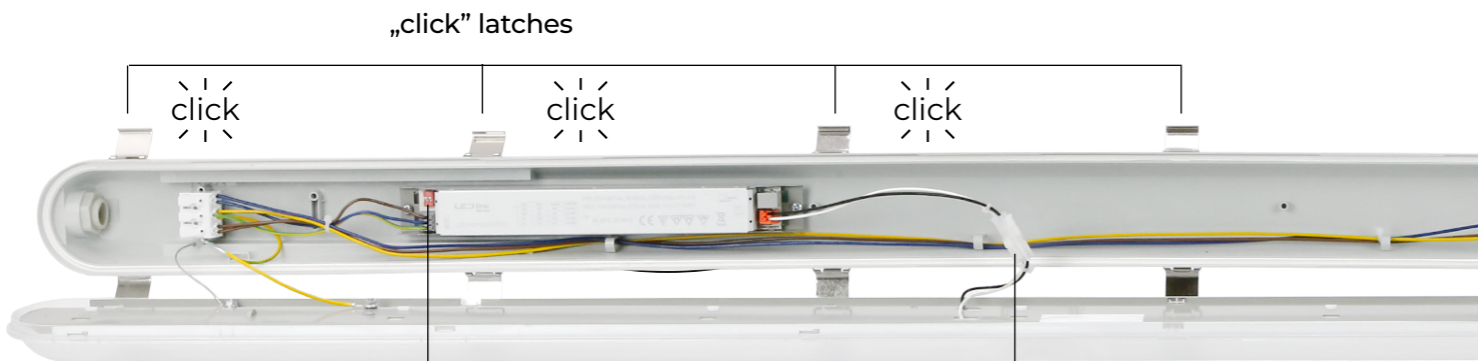

„click” latches



DIP switch for power adjustment

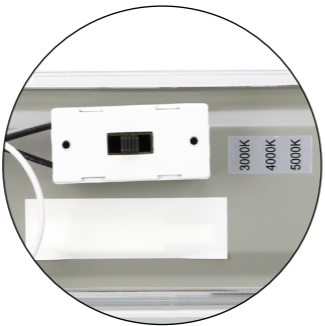

color temperature adjustment
switch 3000-4000-5000K

Through-connection

Hermetic through-connection, which allows the creation of continuous, integrated light lines without the need for additional connectors and boxes. Thanks to its high tightness and resistance to outdoor conditions, the system performs well even in the most demanding environments, providing reliable lighting in harsh operating conditions.



Hermetic luminaire RANGER 180lm/W

SYMBOL		POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR	EEL
210189	New	10-40	120	3000-4000-5000 (CCT)	7200		A ↑ G D
210196	New	10-40	120	3000-4000-5000 (CCT)	7200	●	
210226	New	25-55	120	3000-4000-5000 (CCT)	9900		A ↑ G D
210233	New	30-55	120	3000-4000-5000 (CCT)	9900	●	
210264	New	60-80	120	4000	14400		A ↑ G D
210271	New	60-80	120	4000	14400	●	



Hermetic luminaire RANGER CCT 150lm/W

210202	New	10-40	120	3000-4000-5000 (CCT)	6000		A ↑ G D
210219	New	10-40	120	3000-4000-5000 (CCT)	6000	●	
210240	New	30-55	120	3000-4000-5000 (CCT)	8250		A ↑ G D
210257	New	30-55	120	3000-4000-5000 (CCT)	8250	●	



Hermetic luminaire RANGER 1-10V 170lm/W


201262		40	120	4000	6800		A ↑ G D
--------	--	----	-----	------	------	--	---------------




Hermetic luminaire RANGER 140lm/W

471109		40	120	4000	5600		A ↑ G D
--------	--	----	-----	------	------	--	---------------


DIMENSIONS [mm]




40W
201262




40W
471109



10-40W
210189
210196
210202
210219



25-55W
210226
210233
210240
210257



60-80W
210264
210271



LED line

LEDIN Group Sp. z o.o.
Dębowa 1
07-410 Tobolice
Poland

export@ledline.pl
ledline.eu



/LEDIN Group Sp. z o.o.



/LED line



/LED line