

LED line

CAMINO

ROAD LUMINAIRE



YEAR
WARRANTY

INFRASTRUCTURE THAT WORKS EVERY DAY

Road and outdoor lighting operates regardless of weather conditions, season or traffic intensity. That is why durability, reliability and solutions requiring minimal maintenance are essential for this type of investment.

CAMINO was designed precisely with these requirements in mind. Its robust construction, IP66 ingress protection and components selected for long-term operation make the luminaire well suited to the demands of everyday road infrastructure.

L90B10 - **50.000h**

IP66 / IK08



CAMINO

CAMINO is a road luminaire designed for projects where lighting is expected to perform reliably for years – without generating unnecessary maintenance costs.

Five power options – **50 W, 70 W, 100 W, 150 W and 200 W** – make it easy to select the right solution for everything from smaller roads and car parks to more demanding traffic areas.

The use of **LUMILEDS 2835 LEDs**, proven components and a robust construction results in an **L70B50 lifetime of up to 100,000 hours**. For investors, this means fewer maintenance interventions, less frequent luminaire replacement and more predictable installation operating costs.


7 YEAR
WARRANTY




High luminous
efficacy




CCT
versions

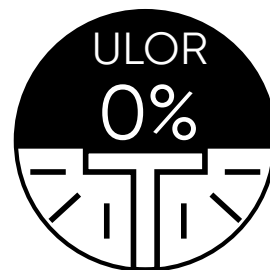


No upward
light emission




LUMILEDS
LEDs

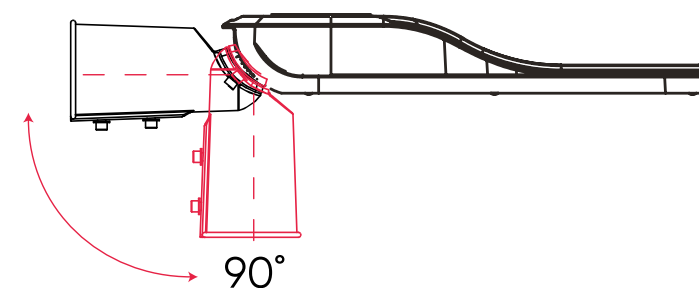


Flexible adjustment
through 90°



LUMILEDS
LEDs



Easy, versatile instal-
lation



10 kV surge protection

ROAD LUMINAIRE CAMINO

Cechy główne

- ▶ High luminous efficacy of up to 140 lm/W
- ▶ Selectable colour temperature (3000/4000/5700 K)
- ▶ Easy pole or outreach arm mounting with $\pm 90^\circ$ tilt adjustment
- ▶ Professional and precise light distribution ($150 \times 110^\circ$)
- ▶ Complies with light pollution requirements thanks to ULOR 0%
- ▶ LUMILEDS LEDs
- ▶ 10 kV surge protection
- ▶ Integrated spirit level for precise installation
- ▶ Long lifetime of L90B10 – 50,000 h
- ▶ Full protection against dust and powerful water jets – IP66
- ▶ High impact resistance – IK08
- ▶ 7-year warranty

EFFICACY 140 lm/W

Power [W]:

50, 70, 100, 150, 200

Luminous flux [lm]:

7000, 9800, 14000, 21000, 28000

Beam angle [°]

150x110 (T2M)

Colour temperature [K]:

4000 CCT 3000-4000-5700



Lifetime [h]:


L90B10 - 50.000

Diffuser:

Tempered glass IP66/IK08

Housing:

aluminium

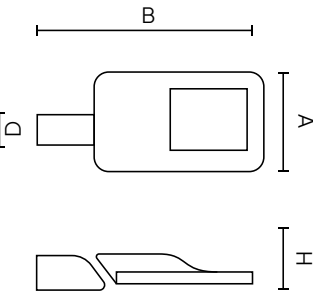

Road luminaire CAMINO



SYMBOL	[W]	[°]	[K]	[lm]	AxBxDxH [mm]
203105	50	T2M	4000	7000	200 x 514 x Ø60 x 133
203105-II	50	T2M	3CCT	7000	200 x 514 x Ø60 x 133
216792	70	T2M	4000	9800	200 x 514 x Ø60 x 133
216792-II	70	T2M	3CCT	9800	200 x 514 x Ø60 x 133
203112	100	T2M	4000	14000	220 x 565 x Ø60 x 133
203112-II	100	T2M	3CCT	14000	220 x 565 x Ø60 x 133
203129	150	T2M	4000	21000	240 x 634 x Ø60 x 133
203129-II	150	T2M	3CCT	21000	240 x 634 x Ø60 x 133
203136	200	T2M	4000	28000	290 x 665 x Ø60 x 133





LED line

WE CO-CREATE



LEDIN Group Sp. z o.o.
Dębowa 1 07-
410 Tobolice
Polska

export@ledline.pl
ledline.eu



/LEDIN Group Sp. z o.o.



/LED line



/LED line