

LED line

LED PANEL


4 CCT





LED PANELS

PANEL 4CCT



EFFICACY UP TO 130 lm/W

Power [W]:
34-36-38-40 (adjustment)

Luminous flux [lm]:
do 5300

Beam angle [°]:
90


Colour temperature [K]:
CCT 2700-3000-4000-5000



Lifetime [h]:
L70B50 - 75.000

Frame:
aluminium

Diffuser:
polystyrene




Key features:

- ▶ Color temperature adjustment in 4 ranges (2700-3000-4000-5000K)
- ▶ Power adjustment in 4 levels (34-36-38-40W)
- ▶ High luminous efficacy up to 130 lm/W
- ▶ Low UGR <19
- ▶ A total of 16 possible settings in a single luminaire

Application:

- ▶ Offices and commercial spaces
- ▶ Hotels and restaurants
- ▶ Educational and medical facilities
- ▶ Retail
- ▶ Public institutions
- ▶ Service premises

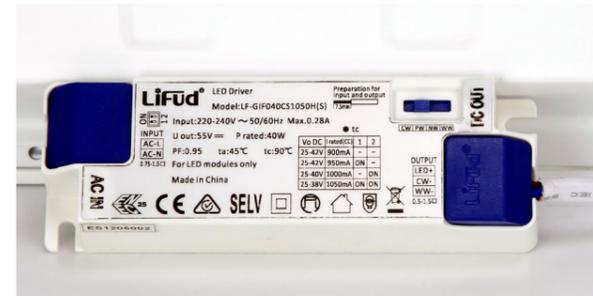


Colour and power adjustment in a single panel

The 4CCT 60×60 LED panel gives you full control over the light: **4 power levels and 4 colour temperatures in a single luminaire** provide a **total of 16 independent lighting settings**, allowing you to tailor the light to almost any space while reducing the number of models needed both for the project and in the warehouse.

High efficacy of up to 130 lm/W, luminous flux up to 5300 lm and a low UGR <19 ensure comfortable, uniform lighting that meets the requirements of modern installations, while the external driver — where the settings are adjusted — makes installation and parameter configuration easier.

A robust polystyrene construction, resistant to bending and dents, minimises the risk of damage during installation, transport and storage.

The 4CCT panel comes with a 5-year warranty.

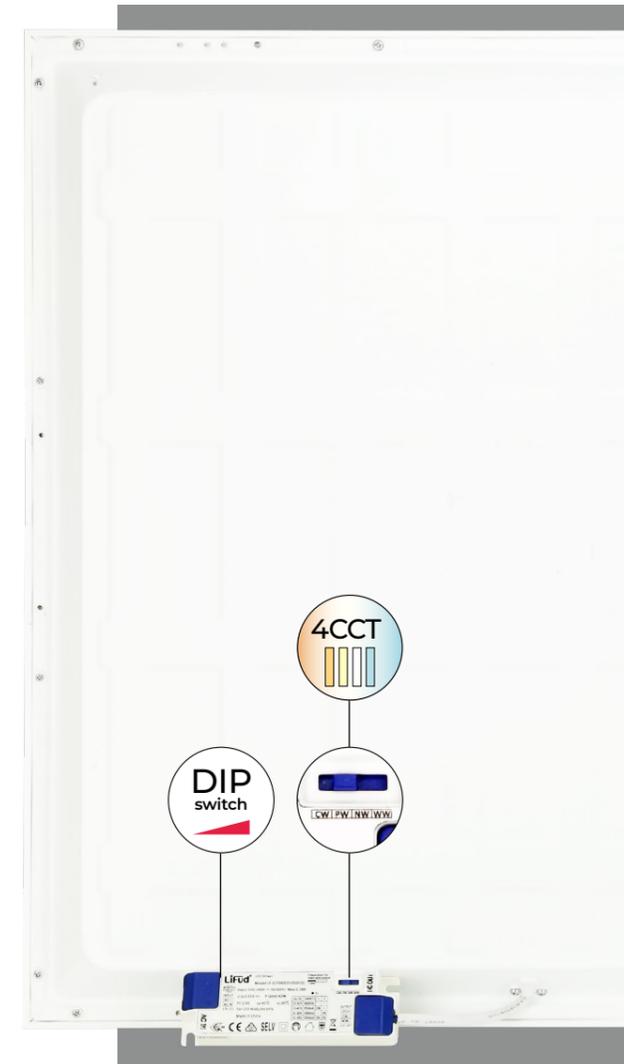

Technical specifications




W	beam	lm	symbol
2700-3000-4000-5000K	90	do 5300	
34-36-38-40	90	do 5300	216846

Accessories



Mounting frames for LED panels

Check the offer www.ledline.pl

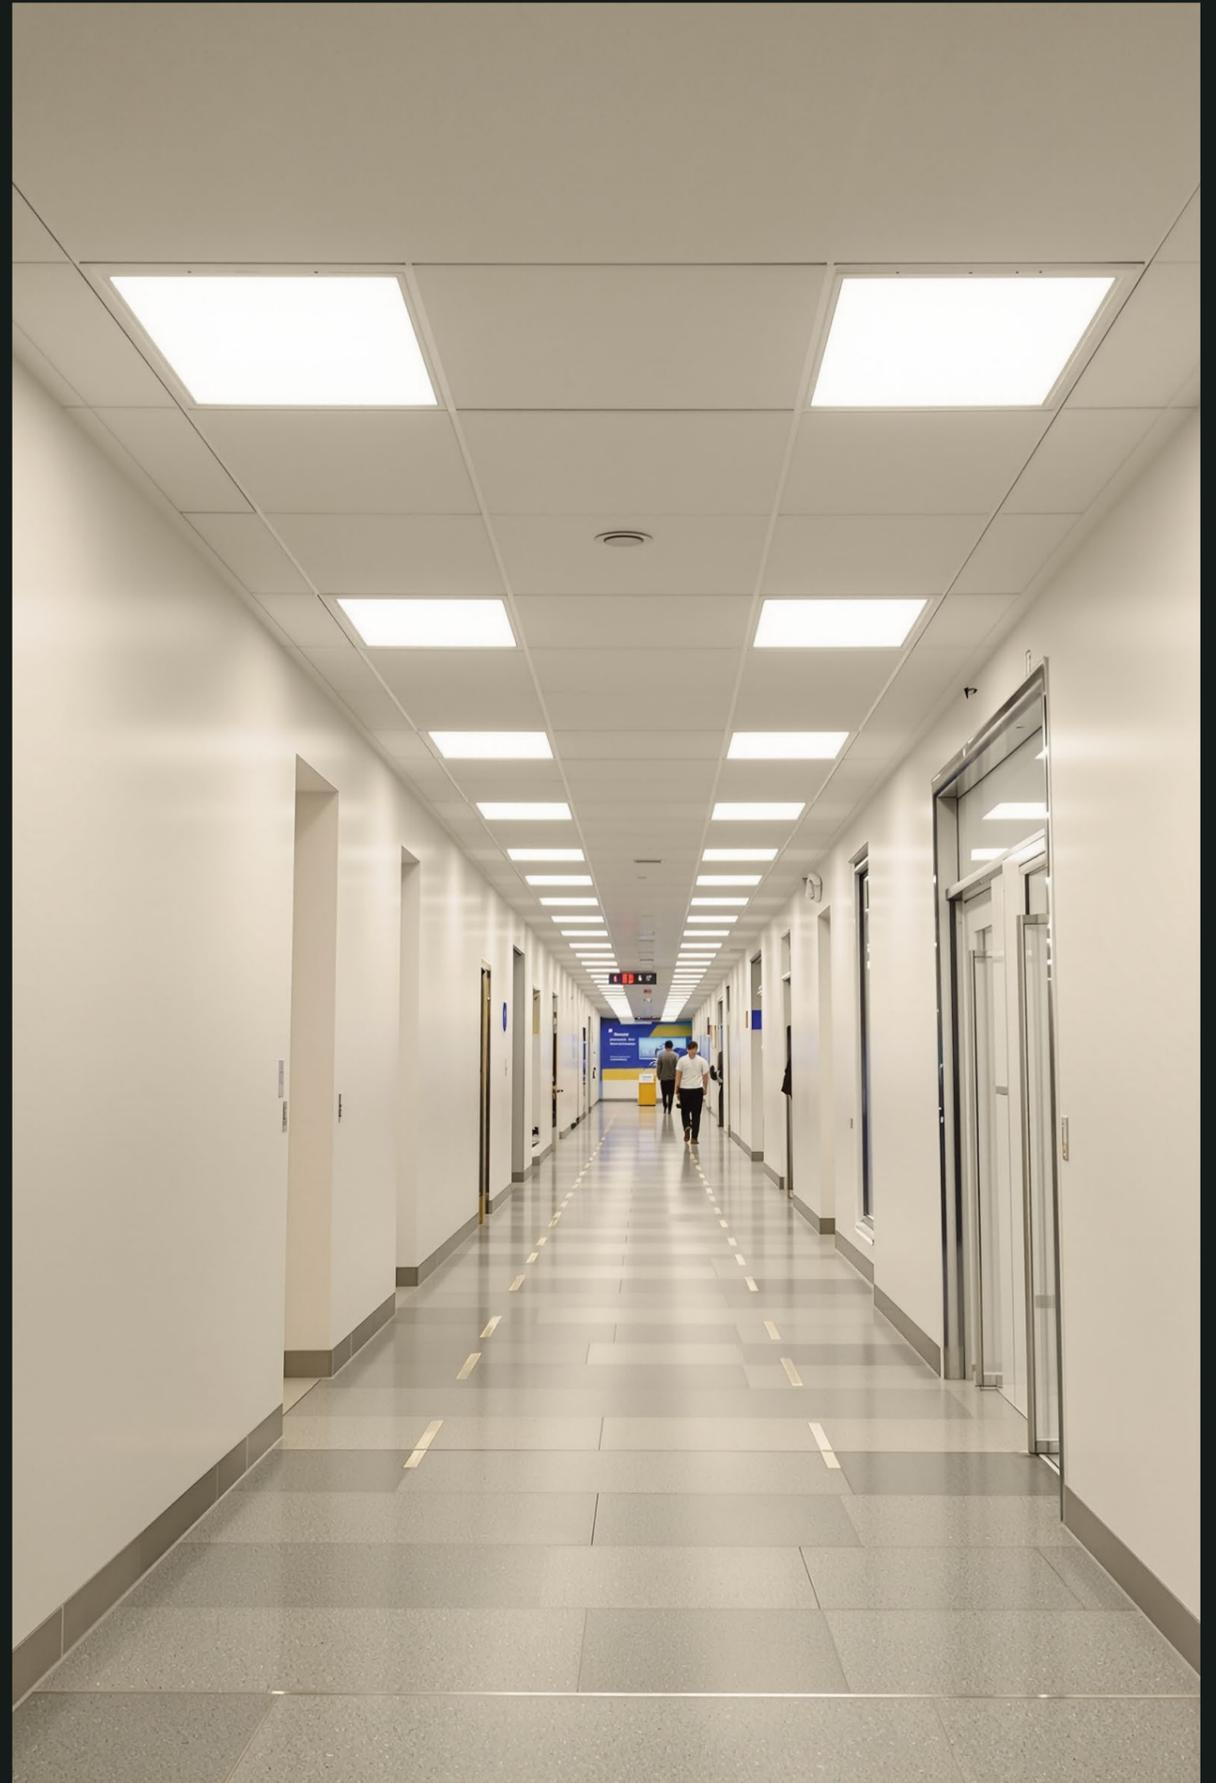

LED line

WE CO-CREATE



LEDIN Group Sp. z o.o.
Dębowa 1
07-410 Tobolice
Poland

export@ledline.pl
ledline.eu

 /LEDIN Group Sp. z o.o.

 /LED line

 /LED line