

TÜV-certified and PZH-certified luminaires

LINKER linear luminaires have been honored with the prestigious TÜV SÜD quality certificate! This unique award is confirmation of the high quality of our products and our commitment to meeting the most stringent quality standards. TÜV SÜD is an independent expert with more than 150 years of experience in the fields of quality, safety and sustainability, which supports activities in the field of modern technology



black version




LED line
PRIME

LINKER models available

Symbol	Name	Length
479587	Luminaire LINKER 21W 4000K 150lm/W IP65	590mm
203709	Luminaire LINKER 30W 4000K 150lm/W IP65	1188mm
479594	Luminaire LINKER 40W 4000K 150lm/W IP65	1188mm
201279	Luminaire LINKER 40W 5000K 150lm/W IP65	1188mm
203754	Luminaire LINKER 40W 4000K 150lm/W IP65 black	1188mm
479600	Luminaire LINKER 55W 4000K 150lm/W IP65	1480mm
201057	Luminaire LINKER 80W 4000K 150lm/W IP65	1480mm

Key features:

- Robust housing
- Available colors: black, gray
- Light efficiency: up to 150lm/W
- Water resistance: IP65
- Certifications: TÜV, Atest PZH
- Warranty: 5 years
- Possibility of connecting through

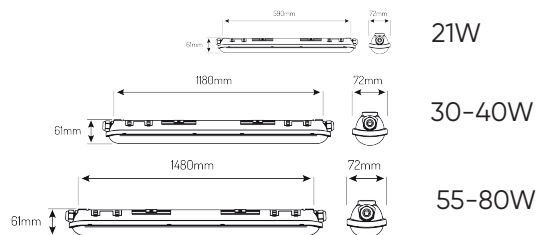

LED line

T. +48 29 764 77 00
E. export@ledline.pl
www.ledline.eu

LEDIN Group Sp. z o.o.
Dębowa 1
07-410 Tobolice
NIP. 7582278888
REGON. 141680103

**HERMETIC
LUMINAIRE
LINKER**

Hermetic Luminaire LINKER

LINKER - industrial luminaires for the demanding

The industrial lighting offer has just expanded! We introduce new products in the LED line PRIME LINKER family - a new 30W and 40W luminaire in black. Our innovative solutions combine not only functionality and aesthetics, but also adapt to a variety of needs and specific requirements of different places, such as medical facilities, food industry, industrial or warehouses.

Combining luminaires allows the creation of uniform continuous lines of light, which contributes to a more even and attractive illumination of the space, improving its appearance and functionality.



We also offer special versions of LINKER fixtures:

- 40W, cool color temperature 5000K (length 1180 mm)
- with increased power of 80W, which allows to obtain a large luminous flux (length 1480 mm)
- with a power of 30W, which provides lower energy consumption (length 1180 mm),
- with a power of 40W in a black, elegant casing (length 1180 mm)

Main features of LINKER luminaires:

- The sturdy housing and shade made of impact-resistant polycarbonate provide **durability and protection from damage**, which translates into long-term satisfaction with use.
- Available in two elegant housing colors: black and universal gray, it can be matched to different interiors and aesthetically blend into the surroundings.
- High luminous efficiency of 150 lm/W guarantees **energy savings and reduction of electricity bills** while maintaining high quality lighting.
- The IP65-compliant airtightness guarantee provides protection from moisture and dust, making the luminaires ideal for a variety of weather conditions.
- Reliability and longevity confirmed by TUV laboratory, PZH certificate and 5-year warranty give **confidence in the robustness of the product and trouble-free use for a long time**.
- LINKER luminaires are available in 4000K and 5000K color temperatures, allowing you to **tailor the lighting to your individual preferences and needs**. A color rendering index of Ra>80 ensures natural ambient colors, which promotes visual comfort and creates a pleasant atmosphere.

