


LED line


MOLLY

3CCT



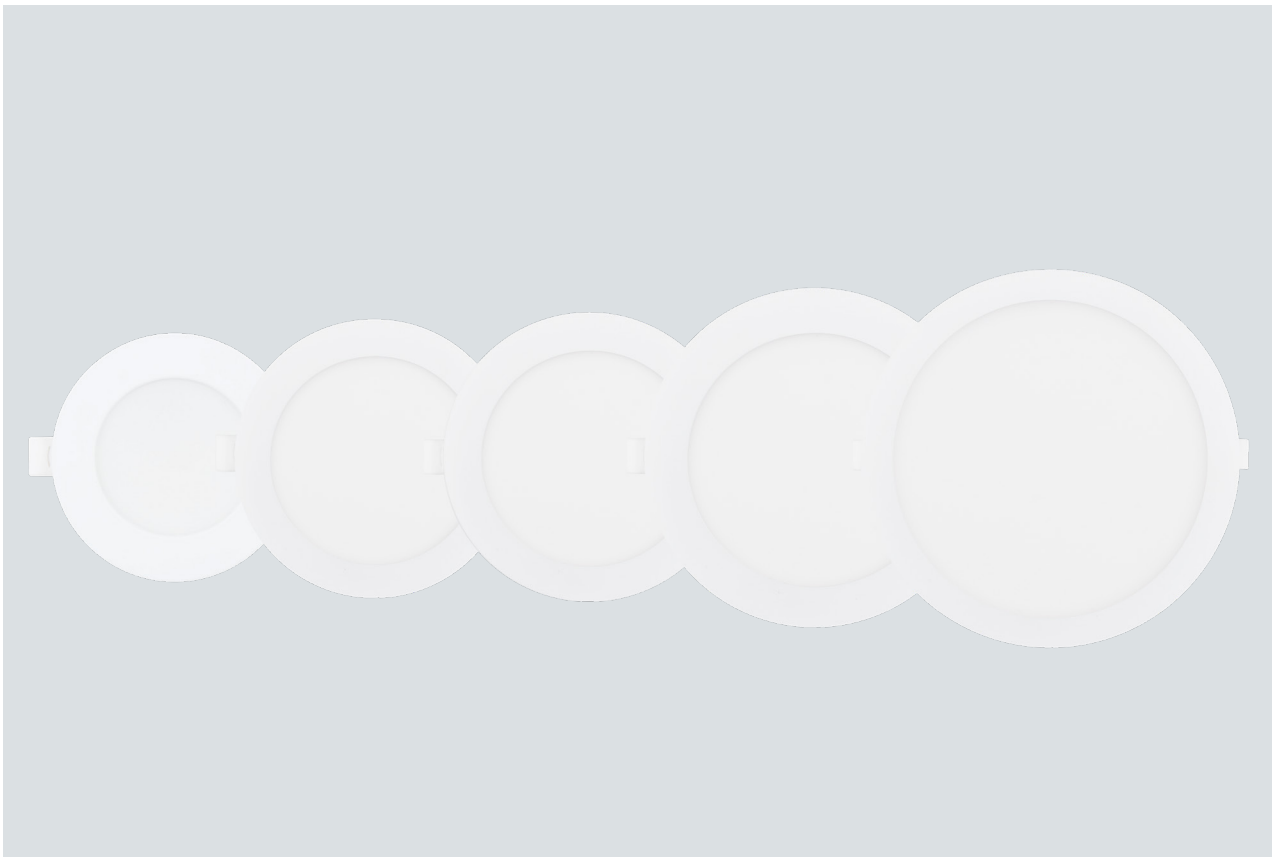

DOWNLIGHT MOLLY 3CCT

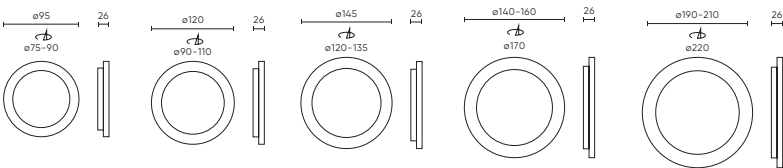

Key features:

- ▶ CCT color adjustment via a switch on the back of the luminaire
- ▶ SLIM housing design – ideal for low ceilings
- ▶ Versatile installation thanks to mounting frames
- ▶ No light flicker effect – FLICKER FREE
- ▶ Wide selection of wattages and diameters
- ▶ Two color versions

EFFICACY UP TO 105 lm/W

Power [W]:
5, 9, 12, 18, 24

Luminous flux [lm]:
500-2400

Beam angle [°]:
120

Colour temperature [K]:
CCT 3000-4000-6000



Lifetime [h]:
L70B50 - 30.000

Housing:
Polycarbonate



Application:

- ▶ Offices and open-plan spaces
- ▶ Corridors and circulation areas
- ▶ Modern residential interiors


One product, a full range of possibilities

MOLLY with Multi-CCT technology gives you full control over light—without the risk of making the wrong choice. The color temperature is set during installation, using a single, intuitive switch. Exactly when you already know the space and its requirements.

The slim housing has been designed with modern architecture in mind. Minimal installation depth, maximum purity of form. MOLLY integrates subtly into the ceiling without dominating the interior.


Thanks to the optional mounting frame, you can quickly change the installation method from recessed to surface-mounted. One solution—multiple design scenarios.

For wholesalers and distributors, MOLLY means fewer SKUs, lower inventory risk, and greater availability. One product replaces three color temperature variants. Less shelf space, more control over stock levels.


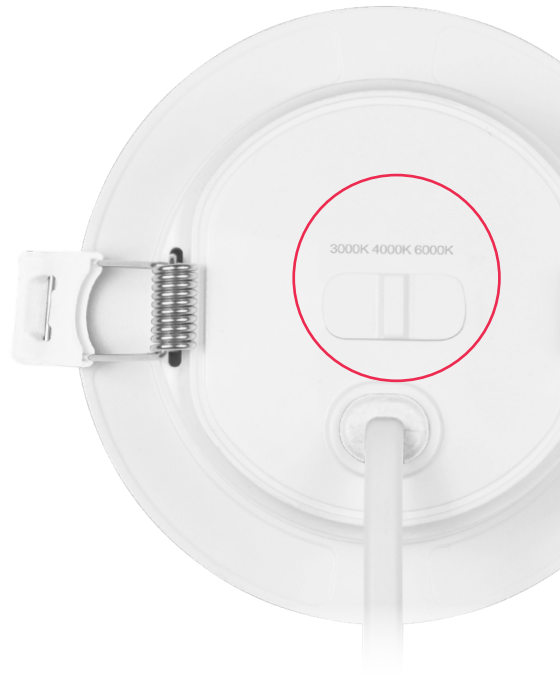


Mounting frames


A quick way to transform a recessed panel into an elegant surface-mounted luminaire. It allows the installation method to be adapted to any ceiling—especially where there is no space for recessed mounting or no possibility to cut an opening. A simple solution for the installer and greater flexibility for the investment.

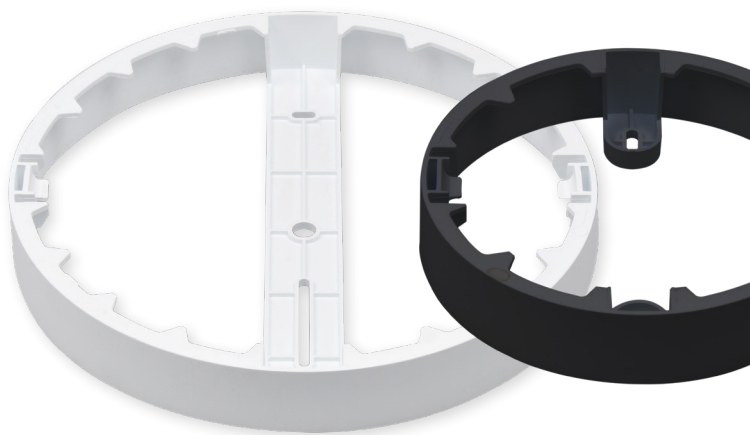

120°

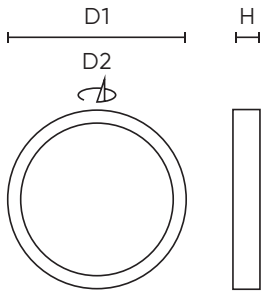


Downlight MOLLY white round IP20 LITE




SYMBOL	[W]	[°]	[K]	[lm]	D1xHxD2 [mm]	EEI
200746-II	5	120	3000-4000-6000 (CCT)	500	Ø95 x 26 x 75-90	
200760-II	9	120	3000-4000-6000 (CCT)	900	Ø126 x 26 x 90-110	
200784-II	12	120	3000-4000-6000 (CCT)	1200	Ø145 x 26 x 120-135	
200807-II	18	120	3000-4000-6000 (CCT)	1800	Ø170 x 26 x 140-160	
200821-II	24	120	3000-4000-6000 (CCT)	2400	Ø225 x 26 x 190-210	

Downlight MOLLY 3CCT black round IP20 LITE




SYMBOL	[W]	[°]	[K]	[lm]	AxBxH [mm]	EEI
227538-II	5	120	3000-4000-6000 (CCT)	450	Ø95 x 26 x 75-90	
227545-II	9	120	3000-4000-6000 (CCT)	800	Ø95 x 26 x 90-110	
209855-II	12	120	3000-4000-6000 (CCT)	1100	Ø120 x 26 x 120-135	
205628-II	18	120	3000-4000-6000 (CCT)	1600	Ø145 x 26 x 140-160	
209879-II	24	120	3000-4000-6000 (CCT)	2150	Ø170 x 26 x 190-210	

MOLLY-II frame white

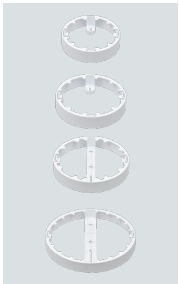

SYMBOL	[W]	DxH [mm]
200913-II	9	Ø126 x 32
200920-II	12	Ø145 x 32
200937-II	18	Ø170 x 32
200944-II	24	Ø225 x 32

MOLLY-II frame black



SYMBOL	[W]	DxH [mm]
227583-II	9	Ø126 x 32
205666-II	12	Ø145 x 32
205673-II	18	Ø170 x 32
205680-II	24	Ø225 x 32



LED line

WE CO-CREATE



LEDIN Group Sp. z o.o.
Dębowa 1
07-410 Tobolice
Poland

export@ledline.pl
ledline.eu

 /LEDIN Group Sp. z o.o.

 /LED line

 /LED line