The most important parameters:

• wide wattage selection:

12W 18W

- luminous efficiency in the range 90-110 lm/W
- protection class: IP20
- colour temperature: 3,000 K, 4,000 K, CCT 3,000/4,000/6,000 K
- version with or without motion sensor
- natural light effect due to Ra>80
- universal frame

MOLLY luminaire models available

Symbol	Power	Luminous flux	colour temperature	Luminaire shape	motion sensor
200739	5W	450lm	3000K	round	
200746	5W	500lm	4000K	round	
200753	9W	830lm	3000K	round	
200760	9W	900lm	4000K	round	
200777	12W	1150lm	3000K	round	
200784	12W	1250lm	4000K	round	
200791	18W	1750lm	3000K	round	
200807	18W	1900lm	4000K	round	
200814	24W	2350lm	3000K	round	
200821	24W	2550lm	4000K	round	
200999	18W	1900lm	3000-6000K	round	
201002	24W	2550lm	3000-6000K	round	
201019	18W	1900lm	4000K	round	X
201026	24W	2550lm	4000K	round	X
201033	5W	450lm	3000K	square	
201040	5W	500lm	4000K	square	
200838	9W	830lm	3000K	square	
200845	9W	900lm	4000K	square	
200852	12W	1150lm	3000K	square	
200869	12W	1250 l m	4000K	square	
200876	18W	1750lm	3000K	square	
200883	18W	1900lm	4000K	square	
200890	24W	2550lm	3000K	square	
200906	24W	2550lm	4000K	square	

Frames for surface mounting

200913	Round frame MOLLY 9W
200920	Round frame MOLLY 12W
200937	Round frame MOLLY 18W
200944	Round frame MOLLY 24W
200951	Square frame MOLLY 9W
200968	Square frame MOLLY 12W
200975	Square frame MOLLY 18W
200982	Square frame MOLLY 24W

LED line

LEDIN Group Sp. z o.o. Debowa 1 T. +48 29 764 77 00 07-410 Tobolice E. kontakt@ledline.pl www.ledline.eu REGON. 141680103








DOWNLIGHT MOLLY



Take advantage of the widest range on the market – choose the perfect option for you among LED panels.

On the one hand, minimalist Scandinavian design, on the other: ease of flush-mounting and surface-mounting. These are some of the characteristics of the broadest range of LED downlight fixtures on the market – a total of **32 products**.

All LED downlight models are available in round and square versions, with wattages ranging from 5 W to 24 W. This means that you will easily be able to choose a light with a wattage tailored to the specific space in which it is to be installed. You can use them, for example, in the reception area at the dentist's practice, in your stylish boutique or in the living room in your own home.

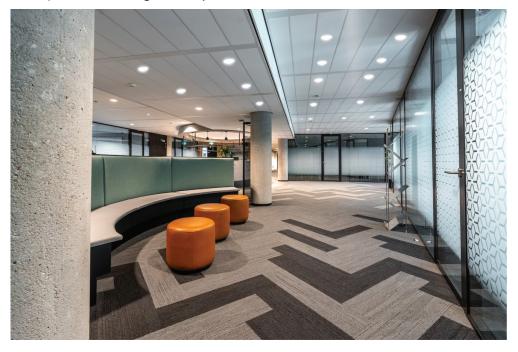

More solutions, more possibilities.

And that's not the end of the story: among the models available, you will also find panels with a motion sensor, which will further save you money on your electricity bill while avoiding having to switch the light on and off yourself.



If you prefer a softer shade of light, then consider the LED CCT models, which allow you to adjust the white colour. Depending on your needs, you can set the lighting to a warmer or cooler shade, which will not only have an impact on aesthetics, but also on the well-being of you and your customers.

2-in-1 solution

For even more convenience, our Molly fixtures can be surface-mounted or flush-mounted. What's more, if you opt for the flush-mounted version, then – thanks to the universal frame – you can easily adapt it to the surface-mounted version if required, further simplifying the installation process.

The LED downlights have components that provide a 3-year guarantee, and their housing and shade are made of durable polycarbonate, hence the longer life of the lighting.

