LED line

ALVERIS
3CCT

LIGHT TAILORED
TO ARCHITECTURE





5 YEAR WARRANTY



3CCT

Adjustable
light color

CLICK

CLICK installation –
attaching the luminaire
to the rear plate

IP65

High resistance to outdoor
conditions

One form, two
lighting directions

OUTDOOR WALL LIGHT

ALVERIS 3CCT

KEY FEATURES

- Adjustable light colour 3CCT (**2700**/3000/4000K)
- Single or bi-directional light output
- IP65-rated and UV-resistant for outdoor use
- Quick and convenient installation (click system)
- Clean form and universal aesthetic

Power [W]:
1x9W, 2x9W

Luminous flux [lm]:
900, 1800

Beam angle [°]
60

Colour temperature [K]:
3CCT (2700/3000/4000)

Lifetime [h]:
L70B50 - 35.000

Housing:
Polycarbonate (Anti-UV)

5 WARRANTY

IP 65

PF 0,9

220-240V AC

IDEAL FOR:

FACADES

ARCHITECTURE

GARDENS

LIGHT TAILORED TO ARCHITECTURE

The ALVERIS luminaire offers full freedom in shaping the lighting effect – with a choice of up/down or single-direction light distribution, it can be precisely adapted to any space.

Its minimalist, geometric form blends seamlessly with modern architectural designs, remaining both a subtle and distinctive element of the structure.

A well-thought-out design featuring the CLICK mounting system ensures quick and convenient installation, while its versatility makes it ideal for both facades and garden spaces.

3CCT


THREE LIGHT COLOURS, ONE LUMINAIRE.

Choosing the right light is no longer a challenge. With the 3CCT function, you can select the ideal colour temperature during installation – perfectly matched to the facade and surroundings, without the risk of a wrong decision.


Combined with a durable construction resistant to UV and outdoor conditions, ALVERIS maintains its appearance and lighting performance for years.



2700K
warm, ambient light creating a cosy atmosphere

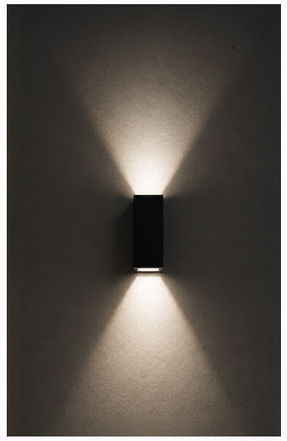

3000K
subtly warm, versatile light for everyday use

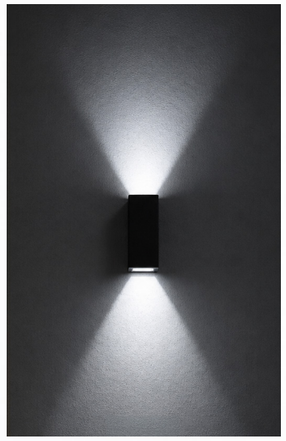

4000K
neutral, cooler light highlighting architectural details



LED line PRIME

CLICK INSTALLATION

QUICK AND CONVENIENT FACADE INSTALLATION

ALVERIS has been designed to make installation as simple as possible and eliminate unnecessary steps.

The CLICK system allows you to first prepare the mounting plate with the power supply connected, and then attach the luminaire in a single motion.





EASY
intuitive and easy installation

SAFELY
safe connection
with plug-in pins

FAST
safe connection
with plug-in pins

1 INSTALL THE MOUNTING PLATE

Fix the rear plate to the facade and connect the wires.

2 CLICK THE LUMINAIRE INTO THE PLATE

The luminaire fits perfectly into the plate using PIN connectors.

3 DONE!

The pins automatically connect the power – enjoy your new light!



LED line

WE CO-CREATE

LIGHTINGEUROPE
THE VOICE OF THE LIGHTING INDUSTRY

Polski Klaster Budowlany
Wiarygodność • Rzetelność • Innowacyjność

PZPO Polski Związek Przemysłu Oświetleniowego

LEDIN Group Sp. z o.o.
Dębowa 1
07-410 Tobolice
Poland

export@ledline.pl
ledline.eu

/LEDIN Group Sp. z o.o.

/LED line

/LED line