

LED line

LIGHT SOURCES

3CCT


SET THE COLOUR
KEEP THE CONTROL




YEAR
WARRANTY



3 light colors
in one bulb



Physical DIP CCT
switch



Consistent brightness
in every CCT

LIGHT SOURCES

BASIC 3CCT

Key features

- ▶ 3CCT - three light colors in one bulb (2700K / 4000K / 6500K)
- ▶ Physical DIP switch for stable and precise color selection
- ▶ No accidental color change during switching
- ▶ Available in E27 12W and GU10 7W versions
- ▶ 3-year warranty

EFFICACY UP TO 100 lm/W

Power [W]:
7 (GU10), 12 (E27)

Luminous flux [lm]:
630 (GU10), 1200 (E27)

Beam angle [°]
120 (GU10), 210 (E27)

Colour temperature [K]:
CCT 2700–4000–6500



Lifetime [h]:
L70B50 - 15.000

Diffuser:
polycarbonate

Housing:
polycarbonate



SET THE COLOR, KEEP THE CONTROL

One bulb, three options – LED line CCT light sources with a colour temperature change function using a simple switch on the housing, with no need to use an app.

Choose warm, neutral or cool light at any time, enjoying consistently high luminous efficacy and excellent colour rendering. This universal “3 in 1” solution helps reduce warehouse stock and perfectly match the light to any arrangement or mood.



3CCT FLEXIBILITY

One light source gives you the power to create three completely different lighting environments. From warm and intimate, through neutral and balanced, to bright and highly functional - all within a single bulb.



2700K

The 2700K color temperature creates warm, cozy light that softens the space and builds a homely atmosphere. Ideal for use in restaurants, boutique hotels, relaxation zones, and private interiors where comfort and emotional connection with the surroundings matter.


4000K

4000K is a neutral light that doesn't dominate the space or "distort" color perception. It's perfect for showrooms, offices, car dealerships, electronics and appliance stores, and spaces where precise product presentation matters.



6500K

6500K is the color temperature closest to natural daylight. Ideal for workshops, production areas, photography studios, and all spaces where perfect color rendering and maximum light intensity are crucial.

210°




120°

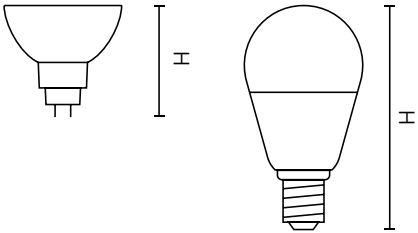

LED light source BASIC GU10 CCT 230V PC LITE

SYMBOL	[W]	 [°]	 [K]	 [lm]	DxH [mm]	EEI
222304	7	120	2700-4000-6500	630	Ø50 x 56	



LED light source E27 3CCT 230V A60 LITE

SYMBOL	[W]	 [°]	 [K]	 [lm]	DxH [mm]	EEI
222311	12	210	2700-4000-6500	1200	Ø60 x 110	

LED line

WE CO-CREATE



LEDIN Group Sp. z o.o.
Dębowa 1
07-410 Tobolice
Poland

export@ledline.pl
ledline.eu

 /LEDIN Group Sp. z o.o.

 /LED line

 /LED line