

LED line PRIME

Code: 204331

EAN: 5905378204331

LED line PRIME FUSION linear lamp
60W 4000K 7800lm 0-10V P18° white



The FUSION 60W LED line PRIME is characterized by high performance, generating a 7800 lm light stream at 4000 K colour temperature. Its effectiveness is 130 lm/W, providing effective lighting. It is characterized by the possibility of regulating brightness in the range 0-10 V and impact resistance IK08 and IP20 leak class. The aluminum used effectively drains heat, which prolongs product life to 50,000 hours.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1 s
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Length	1444
Width	70
Height	52

LED line PRIME

Code: 204331


EAN: 5905378204331

LED line PRIME FUSION linear lamp
60W 4000K 7800lm 0-10V P18° white


Technical drawing

Light distribution

Additional product photos

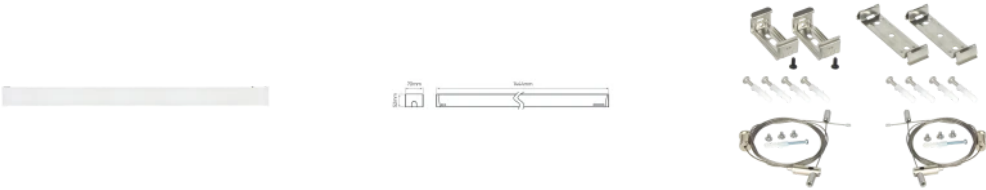


Logistics data




Single packaging

Width	1444 mm
Height	31 mm
Length	70 mm
Weight	1,97 kg



Bulk packaging

Quantity	12
Width	1550 mm
Height	260 mm
Length	120 mm
Volume	0,048 m3
Weight	23,89 kg
Comments	



Europallet

Quantity	144
Height	1820 mm
Quantity in layer	12
Number of layers	7
Bulk quantity	12
Weight	25 kg

LED line PRIME

Code: 204331

EAN: 5905378204331

**LED line PRIME FUSION linear lamp
60W 4000K 7800lm 0-10V P18° white**

Example application