

LED line PRIME


Code: 475831

EAN: 5907777475831

LED line PRIME FUSION linear lamp  
40W 4000K 5200lm 0-10V PC Cover 120°  
black



FUSION LED line PRIME linear luminaire 40W and 4000K colour temperature provides a light stream of 5200 lm. Thanks to 130 lm/W efficiency and 120° light distribution angle, the holder guarantees uniform lighting. It is characterized by a solid aluminium body, which promotes effective heat discharge and prolongs its lifespan.

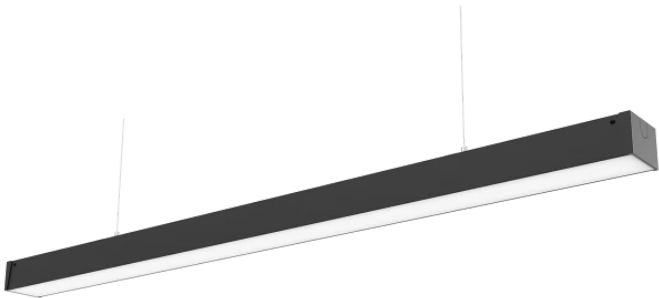

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	5200
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Lamp's warm-up time to 60%	1 s
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Length	1158
Width	70
Height	52

LED line PRIME

Code: 475831


EAN: 5907777475831

LED line PRIME FUSION linear lamp  
40W 4000K 5200lm 0-10V PC Cover 120°  
black

Technical drawing




Light distribution



Additional product photos




Logistics data




Single packaging

Width	1158 mm
Height	39 mm
Length	70 mm
Weight	1,82 kg



Bulk packaging

Quantity	12
Width	1260 mm
Height	260 mm
Length	120 mm
Volume	0,039 m3
Weight	22,09 kg
Comments	



Europallet

Quantity	144
Height	1820 mm
Quantity in layer	12
Number of layers	7
Bulk quantity	12
Weight	25 kg

---

LED line PRIME

Code: 475831

EAN: 5907777475831

**LED line PRIME FUSION linear lamp  
40W 4000K 5200lm 0-10V PC Cover 120°  
black**

---

**Example application**