

LED line PRIME


Code: 475701

EAN: 5907777475701

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 0-10V 120*120°
black



FUSION 20W LED line PRIME is an advanced solution that is characterized by a light efficiency of 130 lm/W and a life of 50,000 hours. By emitting a neutral light with a colour temperature of 4000K, it provides a light stream reaching 2,600 lumens. Built-in 0-10V dimming functions and high IP20 and IK08 leak class provide high protection against damage.

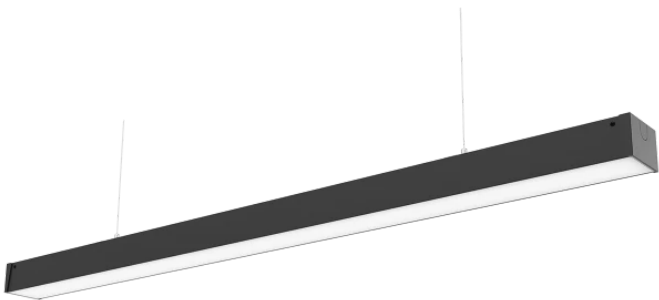

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1 s
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Length	586
Width	70
Height	52

LED line PRIME

Code: 475701


EAN: 5907777475701

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 0-10V 120*120°
black

Technical drawing




Light distribution

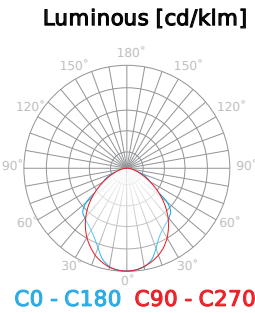

Additional product photos




Logistics data




Single packaging

Width	78 mm
Height	57 mm
Length	670 mm
Weight	0,953 kg



Bulk packaging

Quantity	12
Width	260 mm
Height	255 mm
Length	690 mm
Volume	0,046 m3
Weight	11,44 kg
Comments	



Europallet

Quantity	288
Height	1530 mm
Quantity in layer	4
Number of layers	6
Bulk quantity	24
Weight	274,56 kg

LED line PRIME

Code: 475701

EAN: 5907777475701

**LED line PRIME FUSION linear lamp
20W 4000K 2600lm 0-10V 120*120°
black**

Example application