

LED line PRIME

Code: 204072

EAN: 5905378204072

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 0-10V 120*120°
white



FUSION 20W linear housing from PRIME LED line is an excellent lighting solution. It emits a light stream of 2,600 lumens at a colour temperature of 4000 K, which ensures excellent light quality. With 130 lm/W efficiency and 0.9 PF power factor, the product is energy efficient and efficient. The integrated dimming of the 0-10V standard and the possibility of surface mounting make the frame extremely versatile.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1 s
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Length	586
Width	70
Height	52

LED line PRIME

Code: 204072


EAN: 5905378204072

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 0-10V 120*120°
white


Technical drawing

Light distribution

Additional product photos

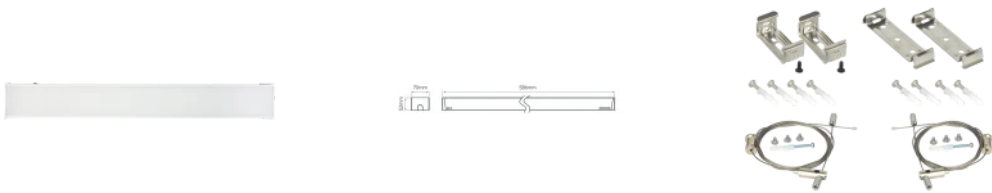


Logistics data




Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg



Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	



Europallet

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

LED line PRIME

Code: 204072

EAN: 5905378204072

**LED line PRIME FUSION linear lamp
20W 4000K 2600lm 0-10V 120*120°
white**

Example application