


LED line PRIME

Code: 241253

EAN: 5901583241253

LED line downlight aluminium round adjustable SLIM black brushed OROSA

The SLIM LED line ceiling housing is distinguished by its elegant, black finish and modern design, which fits a variety of interior arrangements. Its diameter of 92 mm and made of aluminium ensure durability and aesthetic appearance. By adjusting the lighting angle by 35 degrees it is possible to direct the light where necessary. IP20 seal class makes it ideal for interiors.

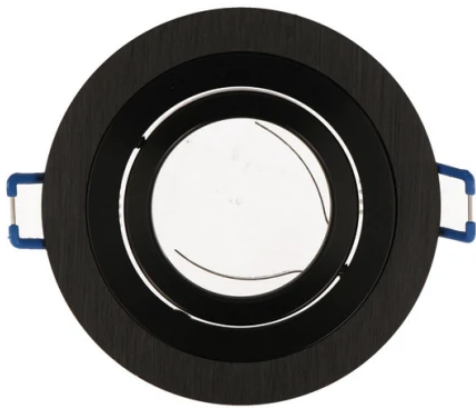

Technical data

Parameter	Value
Warranty	5
IP protection rating	IP20
IEC protection class	III
Maximum suitable lamp power	35 W
Fixture's diameter	92
Lamp's diameter	50 mm
Y-axis angle regulation	35

Parameter	Value
Type of surface suitable for installation	F
Distance from illuminated surface	0.5 m
Installation method	recessed
Mounting hole diameter	85
Height	25
Colour	black
Material (housing)	Aluminium


LED line PRIME

Code: 241253

EAN: 5901583241253

LED line downlight aluminium round adjustable SLIM black brushed OROSA




Technical drawing



Light distribution

Additional product photos

Logistics data



Single packaging

Width	100 mm
Height	100 mm
Length	40 mm
Weight	0,07 kg

Bulk packaging

Quantity	100
Width	440 mm
Height	220 mm
Length	520 mm
Volume	0,050 m3
Weight	10 kg
Comments	

Europallet

Quantity	2800
Height	1760 mm
Quantity in layer	200
Number of layers	8
Bulk quantity	1600
Weight	160 kg

---

LED line PRIME

Code: 241253

EAN: 5901583241253

**LED line downlight aluminium round  
adjustable SLIM black brushed OROSA**

---

**Example application**