


LED line PRIME

Code: LL-200-12-ALU

EAN: 5905378217973

Power Supply 200-12 IP67 200W 12V
Aluminum PRIME

LED line PRIME LL-200-12-ALU is a reliable power source with a maximum power of 200 W, with a output voltage of 12 V. It ensures high efficiency at ≥ 0.91 and is adapted for operation in the input voltage range from 220 to 240 V AC and 50/60 Hz frequency. It has IP67 leak class, which guarantees resistance to water and dust.



Technical data

Parameter	Value
Warranty	5/7*
Power	200 W
Voltage	220-240 V AC
IP protection rating	IP67
IEC protection class	I
Output current range	0 ÷ 16.67A
Wire length	200 mm
Input voltage frequency range	50 ÷ 60Hz
Safety standards	IP67
Efficiency	0,84
Voltage tolerance	-/+0.5V
Ambient humidity	20 ÷ 90%

Parameter	Value
Insulation strength	3kVAC
EMC standards	EN55015
Mounting type	surface
Inrush current (typ.)	30A / 230VAC
Frequency of the supply voltage	50/60Hz
Power Factor	0,95
Ambient temperature suitable for operation	-25÷40
Length	300
Width	45
Height	22
Output voltage	12 V

LED line PRIME


Code: LL-200-12-ALU

EAN: 5905378217973

Power Supply 200-12 IP67 200W 12V

Aluminum PRIME

Technical drawing

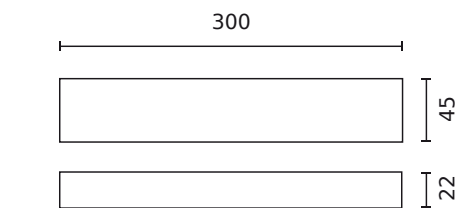


Light distribution

Additional product photos



Logistics data




Single packaging

Quantity	1
Width	54 mm
Height	30 mm
Length	335 mm
Weight	0,696 kg



Bulk packaging

Quantity	30
Width	275 mm
Height	215 mm
Length	350 mm
Weight	20,88 kg



Europallet

Quantity	1260
Height	1505 mm
Bulk quantity	42
Weight	876 kg

LED line PRIME

Code: LL-200-12-ALU

EAN: 5905378217973

Power Supply 200-12 IP67 200W 12V
Aluminum PRIME

Example application