


LED line PRIME

Code: 242946

EAN: 5901583242946

LED line downlight square adjustable  
die cast aluminium satin

LED line ceiling housing Prime is a modern lighting solution that combines elegance with functionality. The square shape and the possibility to adjust the lighting angle to 45 degrees make it perfectly adapt to the individual needs of users. Made of aluminium casting in satin finish, it is characterized by high quality and durability.

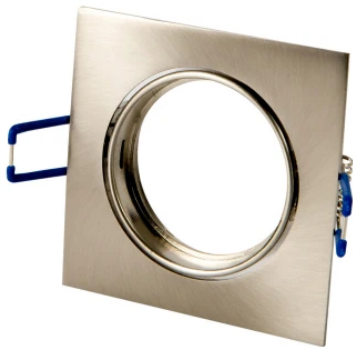

Technical data

Parameter	Value
Warranty	5
IP protection rating	IP20
IEC protection class	III
Maximum suitable lamp power	35 W
Lamp's diameter	50 mm
Y-axis angle regulation	45
Type of surface suitable for installation	F
Distance from illuminated surface	0.5 m

Parameter	Value
Installation method	recessed
Mounting hole diameter	75
Length	84
Width	84
Height	25
Colour	satin
Material (housing)	Die cast aluminium


LED line PRIME

Code: 242946

EAN: 5901583242946

LED line downlight square adjustable  
die cast aluminium satin

Technical drawing

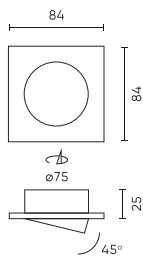


Light distribution

Additional product photos




Logistics data




Single packaging

Width	100 mm
Height	105 mm
Length	40 mm
Weight	0,07 kg



Bulk packaging

Quantity	100
Width	460 mm
Height	220 mm
Length	520 mm
Volume	0,052 m3
Weight	10 kg
Comments	



Europallet

Quantity	2800
Height	1760 mm
Quantity in layer	200
Number of layers	8
Bulk quantity	1600
Weight	160 kg

---

LED line PRIME

Code: 242946

EAN: 5901583242946

**LED line downlight square adjustable  
die cast aluminium satin**

---

**Example application**