

LED line PRIME

Code: LL-75-12

EAN: 5907777479228

Power Supply 75-12 IP67 75W 12V
PRIME



The PRIME 75-12 IP67 LED line power supply is an efficient 75 W power supply, dedicated to LED systems operating in a 12 V voltage. Thanks to the wide range of input voltage from 90 to 264 V AC and operating frequency from 47 to 63 Hz, the product guarantees stable power supply in different conditions. With IP67 seal class, it provides resistance to dust and water, making it an ideal choice for installation in difficult environments.

5
WARRANTY

IP
67

PF
0,95

12V
DC

MAX
-20÷40°C

CE

Technical data

Parameter	Value	Parameter	Value
Warranty	5	Voltage tolerance	-/+5.0%
Power	• 75 W	Ambient humidity	20 ÷ 90%
Voltage	• 90-264 V AC	Insulation strength	3kVAC
IEC protection class	II	EMC standards	EN55015
Output current range	0 ÷ 6,3A	Mounting type	surface
Input voltage frequency range	47 ÷ 63Hz	Inrush current (typ.)	70A / 230VAC
Rated current	6,3A	Ambient temperature suitable for operation	-30÷70
Safety standards	IP67	Output voltage	• 12 V
Efficiency	0,84		


LED line PRIME

Code: LL-75-12

EAN: 5907777479228


Power Supply 75-12 IP67 75W 12V
PRIME

Technical drawing




Light distribution

Additional product photos

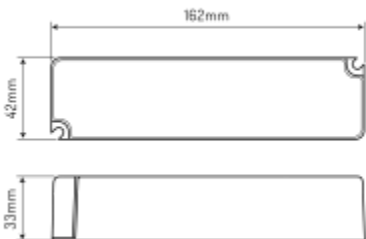

Logistics data




Single packaging

Quantity	1
Width	52 mm
Height	35 mm
Length	185 mm
Weight	0,4 kg



Bulk packaging

Quantity	50
Width	275 mm
Height	195 mm
Length	385 mm
Weight	21 kg



Europallet

Quantity	2400
Height	1200 mm
Bulk quantity	48
Weight	1018 kg

LED line PRIME

Code: LL-75-12

EAN: 5907777479228

**Power Supply 75-12 IP67 75W 12V
PRIME**

Example application