

LED line PRIME

Code: 217577

EAN: 5905378217577

Suntis Solar Wall Light 3000K 170lm
2Ah USB-C Round IP54 Black PRIME

New

Solar facade Suntis from LED line PRIME is a modern lighting solution that combines performance and aesthetics. It emits a pleasant, warm light with a colour temperature of 3000 K, reaching 170 lm. Powered by Li-Ion 3.7V 2000mAh, it provides up to 6 hours of operation after charging. IP54 leak class guarantees resistance to water and dust.



Technical data

Parameter	Value
Warranty	5
Voltage	• 3.7 V DC
Correlated colour temperature	• 3000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP54
IK protection rating	06
IEC protection class	III
Luminous flux	170
Lifetime L70B50	30 000 h
Wyniki tłumaczenia Functional description of the daylight sensor [LUX]	50 lx-ON
Photo cell power	0.9
Photo cell current	0.17

Parameter	Value
Type of battery	Li-Ion 3.7V 2000mAh 18650
Beam angle	180
LED quantity	40
Lifespan	35 000 h
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷40
For indoor use	Outside
Length	151 mm
Width	151 mm
Height	178,5 mm
Weight	0,53 kg
Battery life	6 h
Material (housing)	ABS

LED line PRIME


Code: 217577

EAN: 5905378217577


Suntis Solar Wall Light 3000K 170lm
2Ah USB-C Round IP54 Black PRIME

Technical drawing




Light distribution



Additional product photos

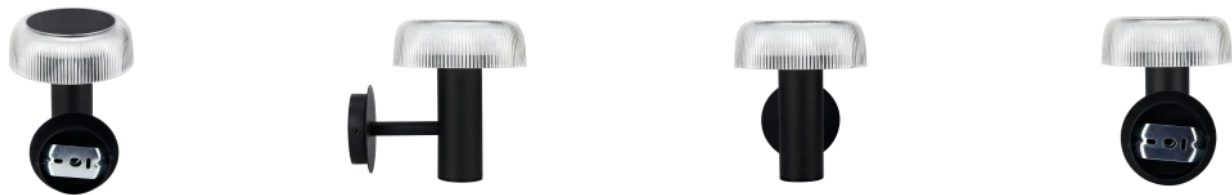

Logistics data



Single packaging

Quantity	1
Width	160 mm
Height	160 mm
Length	200 mm
Weight	0,7 kg

Bulk packaging

Quantity	12
Width	420 mm
Height	275 mm
Length	495 mm
Weight	8,7 kg

Europallet

Height	1,90 m
Quantity in layer	4
Number of layers	4
Bulk quantity	192
Weight	162 kg

LED line PRIME

Code: 217577

EAN: 5905378217577

**Suntis Solar Wall Light 3000K 170lm
2Ah USB-C Round IP54 Black PRIME**

Example application

