

LED line PRIME

Code: 204232

EAN: 5905378204232

LED line PRIME FUSION linear lamp
60W 4000K 7800lm 60*110° white



FUSION linear housing from the LED line PRIME with 60W and 4000K colour temperature generates a light stream of 7800 lm. It is characterized by a high efficiency of 130 lm/W and a wide angle of light distribution of 60x110°. Made of durable aluminum, it provides optimal heat removal and long-term operation (the life of L90B50 is up to 50,000 h). It offers various mounting options, and the IP20 and IK08 protection class make it suitable for interiors.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1 s
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Length	1444
Width	70
Height	52

LED line PRIME

Code: 204232


EAN: 5905378204232

LED line PRIME FUSION linear lamp
60W 4000K 7800lm 60*110° white




Technical drawing

Light distribution

Additional product photos

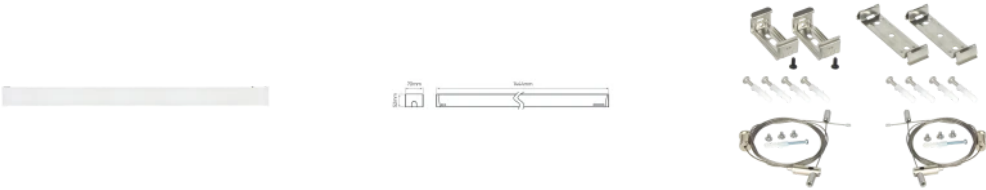

Logistics data



Single packaging

Width	1444 mm
Height	52 mm
Length	70 mm
Weight	1,97 kg

Bulk packaging

Quantity	12
Width	1550 mm
Height	260 mm
Length	260 mm
Volume	0,104 m3
Weight	23,89 kg
Comments	

Europallet

Quantity	144
Height	1550 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	286,8 kg

LED line PRIME

Code: 204232

EAN: 5905378204232

**LED line PRIME FUSION linear lamp
60W 4000K 7800lm 60*110° white**

Example application