

LED line PRIME

Code: 210530

EAN: 5905378210530

Track light LUMICANTO 12-42W CCT
36/60° white PRIME



LUMICANTO rail headlight from LED line PRIME is a modern lighting solution with adjustable power in the range of 12-42W. It is characterized by exceptional light efficiency up to 120 lm/W and wide light angle 36/60°, which ensures optimal light scattering. Built-in LED technology guarantees longevity, reaching as much as 50,000 hours of use.



5
WARRANTY

IK
06

IP
20

PF
0,95

220-240V
AC

MAX
-5÷45°C

Technical data

Parameter	Value	Parameter	Value
Energy efficiency class 2019/2015	E	Fixture's diameter	100 mm
Warranty	5	Beam angle	60/30
Power	<div>• 12-42 W</div>	LED type	COB-Bridgelux
Correlated colour temperature	<div>• 3000 K • 4000K • 6000 K</div>	LED quantity	1
Colour of the light	White	Lifespan	50 000 h
Colour rendering index Ra	90	Power Factor	>0,9
IP protection rating	IP20	Number of on/off cycles	25000
IK protection rating	06	Lamp's warm-up time to 60%	1 s
IEC protection class	II	Ambient temperature suitable for operation	5÷40
Luminous efficacy	up to 120	For indoor use	Inside
Luminous flux	1300-4300	Width	152
The lumen maintenance factor	0,9	Height	165
Lifetime L70B50	50 000 h	Colour	COB-Bridgelux
Colour consistency in McAdam ellipses	≤6	Material (housing)	Aluminium
Mounting type	3 phase rail	Material (cover)	clear glass
Frequency of the supply voltage	50/60Hz		

LED line PRIME

Code: 210530


EAN: 5905378210530

Track light LUMICANTO 12-42W CCT
36/60° white PRIME




Technical drawing

Light distribution

Additional product photos

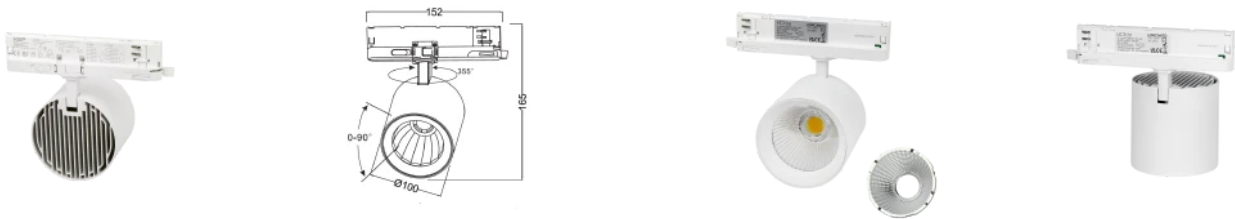

Logistics data



Single packaging

Width	108 mm
Height	175 mm
Length	186 mm
Weight	0,67 kg

Bulk packaging

Quantity	20
Width	385 mm
Height	365 mm
Length	565 mm
Volume	0,079 m3
Weight	16,8 kg

Europallet

Height	1825 mm
Quantity in layer	80
Number of layers	5
Bulk quantity	400
Weight	370 kg

LED line PRIME

Code: 210530

EAN: 5905378210530

**Track light LUMICANTO 12-42W CCT
36/60° white PRIME**

Example application