

LED line LITE


Code: 200890

EAN: 5905378200890

Downlight MOLLY 24W 2550lm 3000K square LITE



LED line LITE Downlight MOLLY 24W produces an impressive 2550lm light stream. It is characterized by a pleasant warm light with a colour temperature of 3000K, which favors visual comfort. The use of SMD LEDs 2835 in combination with high Ra>80 colour reproduction rate provides a natural light effect. The product meets PN-EN standards, and IP20 seal class guarantees effectiveness in various interiors.

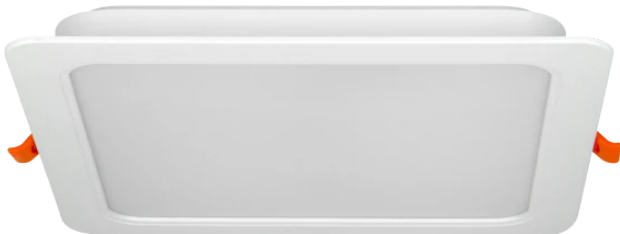

Technical data

Parameter	Value
Energy efficiency class 2019/2015	D
Warranty	3
Power	• 24 W
Voltage	• 170-260 V AC
Correlated colour temperature	• 3000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IEC protection class	II
Luminous efficacy	100
Luminous flux	2350
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6

Parameter	Value
Frequency of the supply voltage	50/60Hz
LED type	SMD LED 2835
LED quantity	144
Power Factor	0,5
Number of on/off cycles	20000
Ambient temperature suitable for operation	-20÷40
For indoor use	Inside
Mounting hole diameter	190-210
Length	220
Width	220
Height	26
Weight	273.4
Colour	White
Material (housing)	Polycarbonate


LED line LITE

Code: 200890


EAN: 5905378200890

Downlight MOLLY 24W 2550lm 3000K square LITE

Technical drawing




Light distribution



Additional product photos




Logistics data




Single packaging

Width	220 mm
Height	26 mm
Length	220 mm
Weight	0,37 kg



Bulk packaging

Quantity	40
Width	450 mm
Height	80 mm
Length	420 mm
Volume	0,015 m3
Weight	15,15 kg



Europallet

Height	1920 mm
Quantity in layer	80
Number of layers	24
Bulk quantity	1920
Weight	727,2 kg

LED line LITE

Code: 200890

EAN: 5905378200890

**Downlight MOLLY 24W 2550lm 3000K
square LITE**

Example application

