

LED line PRIME

Code: LL-200-24-ALU

EAN: 5905378217980

Power Supply 200-24 IP67 200W 24V
Aluminum PRIME



The LED line PRIME 200-24 IP67 power supply is a reliable 200 W power supply designed to work in difficult conditions. It has an assumed output voltage of 24 V, which provides optimal performance for different applications. Its IP67 leak class guarantees resistance to dust and water, making it ideal for internal and external applications.

5
WARRANTY

7
WARRANTY

IP
67

220-
240V
AC

CE

Technical data

Parameter	Value
Warranty	5/7*
Power	• 200 W
Voltage	• 220-240 V AC
IP protection rating	IP67
IEC protection class	I
Output current range	0 ÷ 8.3 A
Output current	8,3 A
Wire length	200 mm
Rated current	1,146 A
Safety standards	IP67
Efficiency	0,84
Voltage tolerance	-/+0.5%

Parameter	Value
Ambient humidity	20 ÷ 90%
Insulation strength	3kVAC
EMC standards	EN55015
Mounting type	surface
Inrush current (typ.)	30A / 230VAC
Frequency of the supply voltage	50/60Hz
Power Factor	0,95
Ambient temperature suitable for operation	-25÷40
Length	300 mm
Width	45 mm
Height	22 mm
Output voltage	• 24 V

LED line PRIME


Code: LL-200-24-ALU

EAN: 5905378217980

Power Supply 200-24 IP67 200W 24V

Aluminum PRIME

Technical drawing

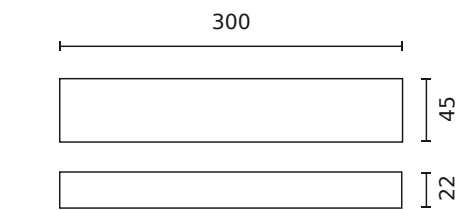


Light distribution

Additional product photos



Logistics data

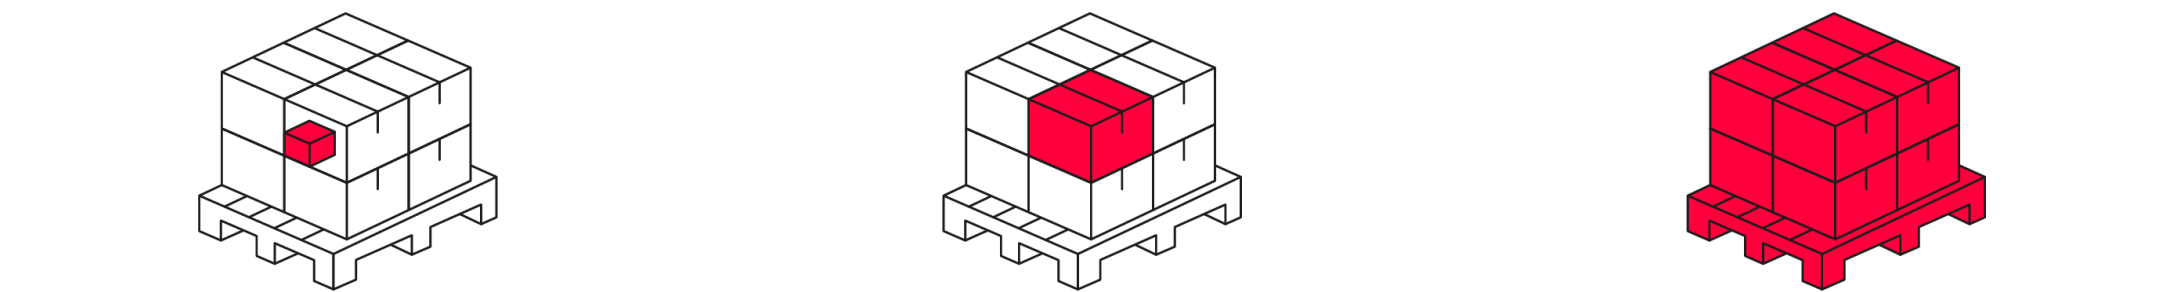

Single packaging

Quantity	1
Width	54 mm
Height	30 mm
Length	335 mm
Weight	0,65 kg

Bulk packaging

Quantity	30
Width	275 mm
Height	215 mm
Length	350 mm
Weight	19,5 kg

Europallet

Quantity	1260
Height	1649 mm
Bulk quantity	42
Weight	585 kg

LED line PRIME

Code: LL-200-24-ALU

EAN: 5905378217980

Power Supply 200-24 IP67 200W 24V
Aluminum PRIME

Example application