

LED line PRIME


Code: 475633

EAN: 5907777475633

LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 0-10V PC Cover 120°  
black



FUSION 20W linear housing from PRIME LED line is an advanced lighting solution, providing a light stream of 2600 lm and a colour temperature of 4000 K. It is characterized by high energy efficiency of 130 lm/W. Its aluminum design guarantees excellent heat discharge, which significantly prolongs life for a minimum of 50,000 hours. The holder supports the 0-10V brightness adjustment and has a light distribution angle of 120°.

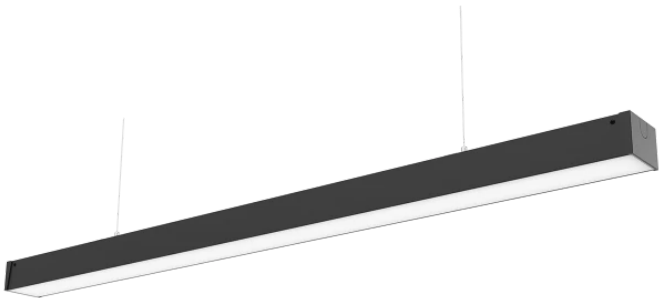

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
IP protection rating	IP20
Luminous efficacy	130
Sling length	200 cm
Standby power	0
Colour consistency in McAdam ellipses	≤6
Luminous flux	2600
Dimmable function	0-10
Survival factor	0.9

Parameter	Value
Lifetime L70B50	50 000 h
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
The lumen maintenance factor	96
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
IEC protection class	I
IK protection rating	08
Lamp's warm-up time to 60%	1 s
Length	586
Width	70
Height	52

LED line PRIME

Code: 475633


EAN: 5907777475633

LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 0-10V PC Cover 120°  
black


Technical drawing




Light distribution

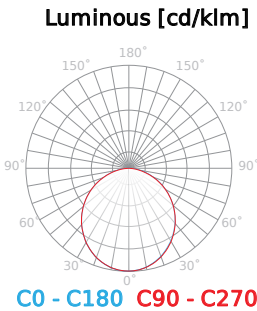

Additional product photos




Logistics data




Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg



Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	



Europallet

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

---

LED line PRIME

Code: 475633

EAN: 5907777475633

**LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 0-10V PC Cover 120°  
black**

---

**Example application**