

LED line PRIME

Code: LL-20-24

EAN: 5907777479198

Power Supply 20-24 IP67 20W 24V
PRIME

The PRIME 20-24 IP67 LED line power supply is an advanced device with 20 W output power, operating in the input voltage range 90-264 V AC. Thanks to its robust design and IP67 leak class, it provides excellent protection against moisture and dust. High efficiency of 0.84 and the power factor PF 0.95 guarantee efficient use of energy.



5
WARRANTY

IP
67

PF
0,95

24V
DC

MAX
-30÷70°C

CE

Technical data

Parameter	Value
Warranty	5
Power	• 20 W
Voltage	• 90-264 V AC
IEC protection class	II
Output current range	0 ÷ 1A
Input voltage frequency range	47 ÷ 63Hz
Rated current	1A
Safety standards	IP67
Efficiency	0,84

Parameter	Value
Voltage tolerance	-/+5.0%
Ambient humidity	20 ÷ 90%
Insulation strength	3kVAC
EMC standards	EN55015
Mounting type	surface
Inrush current (typ.)	15A / 230VAC
Ambient temperature suitable for operation	-30÷70
Output voltage	• 24 V


LED line PRIME

Code: LL-20-24

EAN: 5907777479198


Power Supply 20-24 IP67 20W 24V
PRIME

Technical drawing




Light distribution

Additional product photos

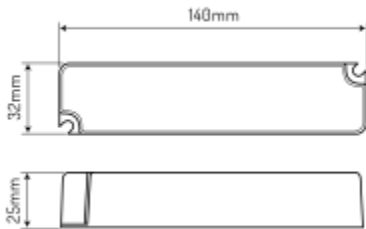


Logistics data




Single packaging

Quantity	1
Width	45 mm
Height	30 mm
Length	165 mm
Weight	0,21 kg



Bulk packaging

Quantity	100
Width	290 mm
Height	230 mm
Length	345 mm
Weight	18 kg



Europallet

Quantity	3200
Height	1020 mm
Bulk quantity	32
Weight	730 kg

LED line PRIME

Code: LL-20-24

EAN: 5907777479198

Power Supply 20-24 IP67 20W 24V
PRIME

Example application