

LED line PRIME


Code: 207813

EAN: 5905378207813

Linear luminaire EXECULINE 30W
4000K 3750lm 120 cm IP20 96° black
PRIME



EXECULINE 30W 4000K 3750lm is a high-quality LED line PRIME product that works perfectly in different interiors. It is characterized by a length of 120 cm and a light angle of 96°, which provides effective space lighting. It emits a colour of white light with a temperature of 4000 K, guaranteeing natural color reproduction thanks to a colour rendering coefficient of 80 Ra.

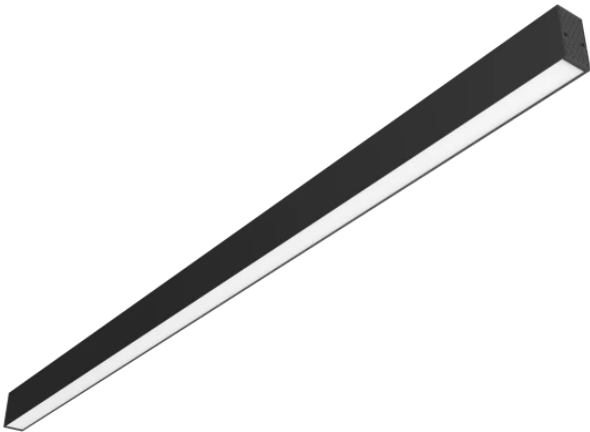

Technical data

Parameter	Value
Energy efficiency class 2019/2015	D
Warranty	5
Power	• 30 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	09
IEC protection class	I
Luminous efficacy	125
Luminous flux	3750
The lumen maintenance factor	96
Lifetime L70B50	50 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤3
Sling length	100 cm
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Beam angle	96
Power Factor	0,9
Lamp's warm-up time to 60%	1 s
Ambient temperature suitable for operation	-15÷45
For indoor use	Inside
Length	1200
Width	35
Height	60
Material (housing)	Aluminium
Material (cover)	polycarbonate

LED line PRIME


Code: 207813

EAN: 5905378207813

Linear luminaire EXECULINE 30W
4000K 3750lm 120 cm IP20 96° black
PRIME

Technical drawing


Light distribution



Additional product photos




Logistics data




Single packaging

Quantity	1
Width	1250 mm
Height	82 mm
Length	41 mm
Weight	1,1 kg



Bulk packaging

Quantity	10
Width	220 mm
Height	180 mm
Length	1260 mm
Volume	0,049 m3
Weight	11,35 kg
Comments	0,144



Europallet

Height	1800 mm
Quantity in layer	200
Number of layers	10
Bulk quantity	2000
Weight	2270 kg

LED line PRIME

Code: 207813

EAN: 5905378207813

**Linear luminaire EXECULINE 30W
4000K 3750lm 120 cm IP20 96° black
PRIME**

Example application

