

LED line PRIME

Code: 203990

EAN: 5905378203990

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 60*110° white



LED line mount PRIME FUSION 20W 4000K is a modern lighting solution that offers a high luminous flux of 2600 lm with 130 lm/W efficiency. It is characterized by an angle of light distribution 60x110°, which provides uniform lighting in different spaces. Made of durable aluminum, it guarantees long service life and efficient heat discharge. The housing has IP20 protection and L70B50 durability of 50,000 hours.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
IP protection rating	IP20
Luminous efficacy	130
Sling length	200 cm
Standby power	0
Colour consistency in McAdam ellipses	≤6
Luminous flux	2600
Survival factor	0.9
Lifetime L70B50	50 000 h

Parameter	Value
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
The lumen maintenance factor	96
Power Factor	0,9
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
IEC protection class	I
IK protection rating	08
Lamp's warm-up time to 60%	1 s
Length	586
Width	70
Height	52

LED line PRIME

Code: 203990


EAN: 5905378203990

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 60*110° white




Technical drawing

Light distribution

Additional product photos

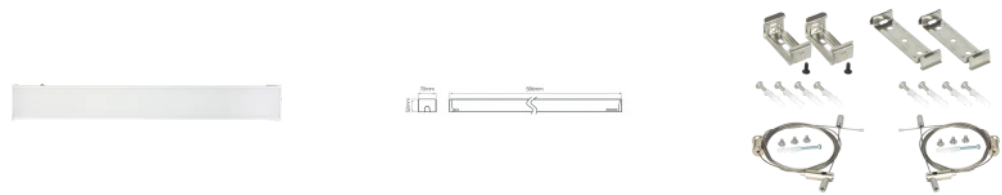

Logistics data



Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg

Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	

Europallet

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

LED line PRIME

Code: 203990

EAN: 5905378203990

**LED line PRIME FUSION linear lamp
20W 4000K 2600lm 60*110° white**

Example application