

LED line PRIME


Code: 475602

EAN: 5907777475602

FUSION 20W 4000K 2600lm 120° BLACK PRIME



FUSION 20W linear mounting from LED line PRIME is a modern 20W and 2600 lm light stream solution. It is characterized by a colour temperature of 4000 K and a wide angle of light distribution of 120°. Made of durable aluminum, it provides excellent heat draining, which increases its durability to 50,000 hours. IP20 and IK08 leak class guarantee resistance to mechanical damage.

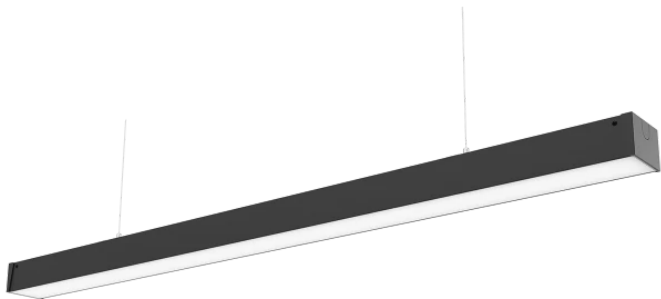

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
IP protection rating	IP20
Luminous efficacy	130
Sling length	200 cm
Standby power	0.9
Colour consistency in McAdam ellipses	≤6
Luminous flux	2600
Survival factor	0.9
Lifetime L70B50	50 000 h

Parameter	Value
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
The lumen maintenance factor	96
Power Factor	0,9
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
IEC protection class	I
IK protection rating	08
Lamp's warm-up time to 60%	1 s
Length	586
Width	70
Height	52

LED line PRIME

Code: 475602


EAN: 5907777475602

FUSION 20W 4000K 2600lm 120° BLACK PRIME

Technical drawing






Light distribution

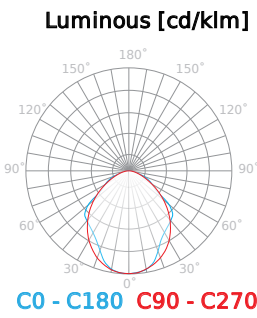

Additional product photos



Logistics data



Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg

Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	

Europallet

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

LED line PRIME

Code: 475602

EAN: 5907777475602

**FUSION 20W 4000K 2600lm 120° BLACK
PRIME**

Example application