

LED line PRIME


Code: 475718

EAN: 5907777475718

LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 0-10V LR40° black



FUSION 20W linear luminaire from LED line PRIME is an efficient light source generating 2600 lm at 20W power, which provides 130 lm/W efficiency. It is characterized by colour temperature 4000K, ideal for different interior arrangements. Made of durable aluminum, it guarantees effective heat discharge and a long lifespan of up to 50,000 hours.

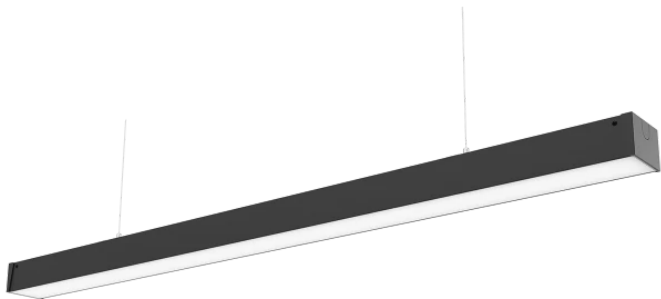

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1 s
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Length	586
Width	70
Height	52

LED line PRIME

Code: 475718


EAN: 5907777475718

LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 0-10V LR40° black

Technical drawing






Light distribution



Additional product photos



Logistics data



Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg

Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	

Europallet

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

---

LED line PRIME

Code: 475718

EAN: 5907777475718

**LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 0-10V LR40° black**

---

**Example application**