

LED line PRIME


Code: 475619

EAN: 5907777475619

LED line PRIME FUSION linear lamp
20W 4000K 2600lm LR40° black



FUSION 20W linear luminaire from LED PRIME line is characterized by modern design and high light efficiency of 130 lm/W. It emits a pleasant, neutral light with a colour temperature of 4000 K, which favors visual comfort. The solid aluminium body provides excellent heat draining and product longevity. Thanks to adjustable lenses and mounting possibilities in various configurations, the setting fits perfectly into a variety of interior arrangements.

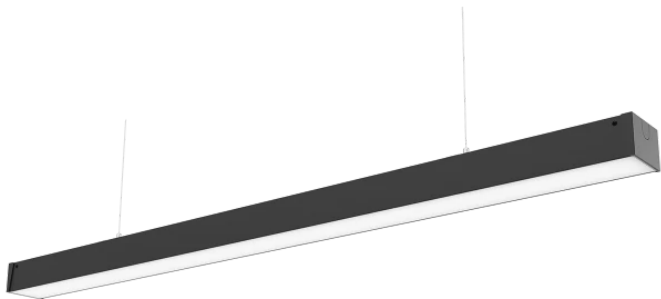

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
IP protection rating	IP20
Luminous efficacy	130
Sling length	200 cm
Standby power	RepIByProf2+RepIByProf3
Colour consistency in McAdam ellipses	≤6
Luminous flux	2600
Survival factor	0.9
Lifetime L70B50	50 000 h

Parameter	Value
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
The lumen maintenance factor	96
Power Factor	0,9
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
IEC protection class	I
IK protection rating	08
Lamp's warm-up time to 60%	1 s
Length	586
Width	70
Height	52

LED line PRIME

Code: 475619


EAN: 5907777475619

LED line PRIME FUSION linear lamp
20W 4000K 2600lm LR40° black

Technical drawing






Light distribution

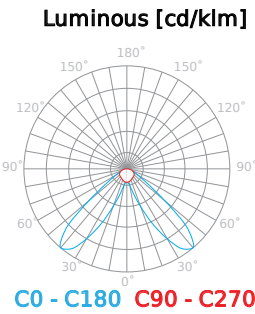

Additional product photos



Logistics data



Single packaging

Width	586 mm
Height	34 mm
Length	70 mm
Weight	1,14 kg

Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	120 mm
Volume	0,021 m3
Weight	13,93 kg
Comments	

Europallet

Quantity	288
Height	1820 mm
Quantity in layer	48
Number of layers	7
Bulk quantity	336
Weight	415,04 kg

LED line PRIME

Code: 475619

EAN: 5907777475619

**LED line PRIME FUSION linear lamp
20W 4000K 2600lm LR40° black**

Example application