


LED line PRIME



Code: 205864

EAN: 5905378205864

LED line PRIME Panel Backlit 34W
4000K 4760lm UGR<19 595x595 0-10V

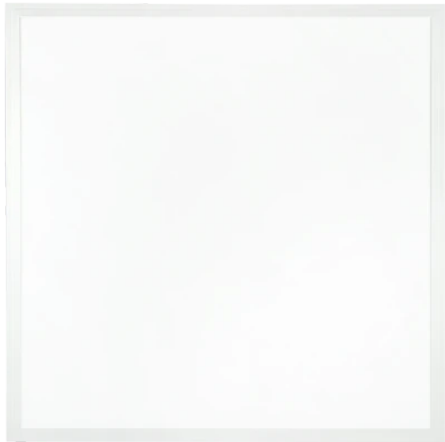

Backlit LED line PRIME panel with 34W power and 4000K light color is a modern solution that stands out for high quality workmanship and 4,760 lumen light stream. The use of SMD LED technology 2835 ensures light efficiency at 140 lm/W. The luminaire is characterized by a low UGR index<19, which affects lighting comfort. Robust aluminum housing guarantees durability and resistance to damage, and a life of L70B50 of 70.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	D
Warranty	5
Power	• 34 W
Voltage	• 200-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	02
IEC protection class	II
Luminous efficacy	140
Luminous flux	4760
The lumen maintenance factor	96
Lifetime L70B50	0
Survival factor	0.9

Parameter	Value
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	90
LED type	SMD LED 2835
LED quantity	72
Power Factor	0,9
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷40
For indoor use	Inside
Height	30
Colour	white
Material (housing)	Aluminium
Material (cover)	Polystyrene

LED line PRIME


Code: 205864

EAN: 5905378205864

LED line PRIME Panel Backlit 34W
4000K 4760lm UGR<19 595x595 0-10V




Technical drawing

Light distribution

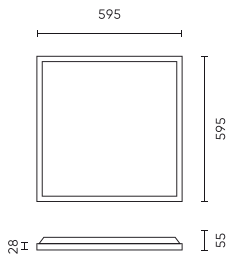

Additional product photos

Logistics data



Single packaging

Quantity	1
Width	30 mm
Height	640 mm
Length	600 mm
Weight	1,53 kg

Bulk packaging

Quantity	5
Width	170 mm
Height	655 mm
Length	615 mm
Volume	0,075 m3
Weight	10,4 kg
Comments	

Europallet

Height	1340 mm
Quantity in layer	30
Number of layers	2
Bulk quantity	60
Weight	124,8 kg

LED line PRIME

Code: 205864

EAN: 5905378205864

**LED line PRIME Panel Backlit 34W
4000K 4760lm UGR<19 595x595 0-10V**

Example application