

LED line PRIME


Code: 475497

EAN: 5907777475497

LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 60\*110° black



The FUSION 20W 4000K linear frame from the PRIME LED line is an excellent solution for outstanding elegance, black housing. It emits a luminous flux of 2600 lumens at 130 lm/W. The 60 x 110° light distribution angle used and the possibility of mounting on suspensions or on plaster make it ideal for various arrangements.

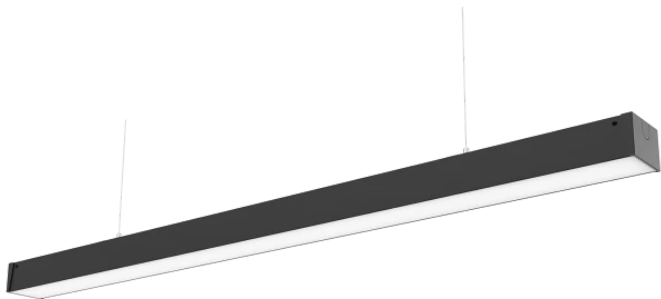

Technical data

| Parameter                             | Value          |
|---------------------------------------|----------------|
| Energy efficiency class 2019/2015     | C              |
| Warranty                              | 5              |
| Power                                 | • 20 W         |
| Voltage                               | • 220-240 V AC |
| Correlated colour temperature         | • 4000 K       |
| Colour of the light                   | White          |
| IP protection rating                  | IP20           |
| Luminous efficacy                     | 130            |
| Sling length                          | 200 cm         |
| Standby power                         | 0              |
| Colour consistency in McAdam ellipses | ≤6             |
| Luminous flux                         | 2600           |
| Survival factor                       | 0.9            |
| Lifetime L70B50                       | 50 000 h       |

| Parameter                                  | Value    |
|--------------------------------------------|----------|
| Mounting type                              | mixed    |
| Frequency of the supply voltage            | 50/60Hz  |
| Colour rendering index Ra                  | 80       |
| The lumen maintenance factor               | 96       |
| Beam angle                                 | 60 x 110 |
| Power Factor                               | 0,9      |
| Ambient temperature suitable for operation | -20÷45   |
| For indoor use                             | Inside   |
| IEC protection class                       | I        |
| IK protection rating                       | 08       |
| Lamp's warm-up time to 60%                 | 1 s      |
| Length                                     | 586      |
| Width                                      | 70       |
| Height                                     | 52       |

LED line PRIME

Code: 475497


EAN: 5907777475497

LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 60\*110° black

Technical drawing




Light distribution



Additional product photos




Logistics data




Single packaging

|        |         |
|--------|---------|
| Width  | 586 mm  |
| Height | 52 mm   |
| Length | 70 mm   |
| Weight | 1,14 kg |



Bulk packaging

|          |          |
|----------|----------|
| Quantity | 12       |
| Width    | 690 mm   |
| Height   | 260 mm   |
| Length   | 260 mm   |
| Volume   | 0,046 m3 |
| Weight   | 13,93 kg |
| Comments |          |



Europallet

|                   |         |
|-------------------|---------|
| Quantity          | 288     |
| Height            | 1710 mm |
| Quantity in layer | 48      |
| Number of layers  | 6       |
| Bulk quantity     | 288     |
| Weight            | 672 kg  |

---

LED line PRIME

Code: 475497

EAN: 5907777475497

**LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 60\*110° black**

---

**Example application**