

LED line PRIME


Code: 201170

EAN: 5905378201170

LED line PRIME Ceiling lamp ACTON  
18W 2000lm 4000K IP54 square



The 18W ACTON LED Plafon generates an impressive light stream of 2000 lm, providing a light performance of 110 lm/W. At 4000K colour temperature, it offers neutral white light, ideal for different spaces. The impact-resistant polycarbonate housing and IP54 leak class guarantee durability and safety of use both inside and outside buildings.

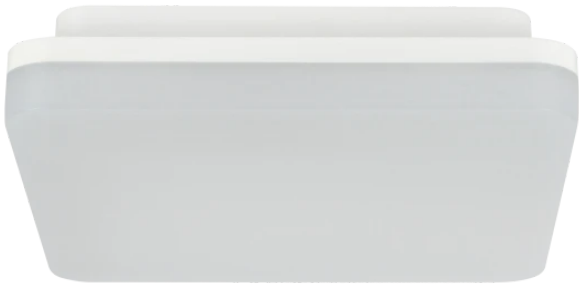

Technical data

Parameter	Value
Energy efficiency class 2019/2015	F
Warranty	5
Power	• 18 W
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP54
IK protection rating	08
IEC protection class	II
Luminous efficacy	110
Luminous flux	2000
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9

Parameter	Value
Dimmable function	PWM
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Fixture's diameter	220
Beam angle	120
LED type	SMD2835
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-25÷40
Height	51
Weight	620
Colour	White
Material (housing)	Polycarbonate
Material (cover)	Polycarbonate


LED line PRIME

Code: 201170


EAN: 5905378201170

LED line PRIME Ceiling lamp ACTON  
18W 2000lm 4000K IP54 square

Technical drawing




Light distribution



Additional product photos




Logistics data




Single packaging

Width	220 mm
Height	220 mm
Length	60 mm
Weight	0,72 kg



Bulk packaging

Quantity	20
Width	470 mm
Height	250 mm
Length	615 mm
Volume	0,072 m3
Weight	14,75 kg



Europallet

Quantity	400
Height	1750 mm
Quantity in layer	40
Number of layers	7
Bulk quantity	280
Weight	206,5 kg

---

LED line PRIME

Code: 201170

EAN: 5905378201170

**LED line PRIME Ceiling lamp ACTON  
18W 2000lm 4000K IP54 square**

---

**Example application**