

LED line LITE

Code: 206779

EAN: 5905378206779

LED line LITE HighBay luminaire
STREAKBAY 200W 4000K 20000lm



HighBay STREAKBAY LED housing with 200W power, 4000K light colour and 20000 lm light stream is an excellent solution for industrial applications. Made of aluminium casting, it provides durability and resistance to atmospheric conditions thanks to IP65 protection class. Asymmetrical 120x60° angle lens minimizes light scattering, providing even illumination for large spaces.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	E
Warranty	5
Power	<ul style="list-style-type: none">200 W
Voltage	<ul style="list-style-type: none">220-240 V AC
Correlated colour temperature	<ul style="list-style-type: none">4000 K
Colour of the light	White
Colour rendering index Ra	80
IK protection rating	08
IEC protection class	I
Luminous efficacy	100
Luminous flux	20000
The lumen maintenance factor	96
Lifetime L70B50	36 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	120x60
LED type	SMD LED
LED quantity	216
Power Factor	0,95
Ambient temperature suitable for operation	-40÷40
Length	1076
Width	118
Height	78
Weight	2600
Material (housing)	Die cast aluminium
Material (cover)	Polycarbonate

LED line LITE


Code: 206779

EAN: 5905378206779


LED line LITE HighBay luminaire
STREAKBAY 200W 4000K 20000lm

Technical drawing


Light distribution



Additional product photos

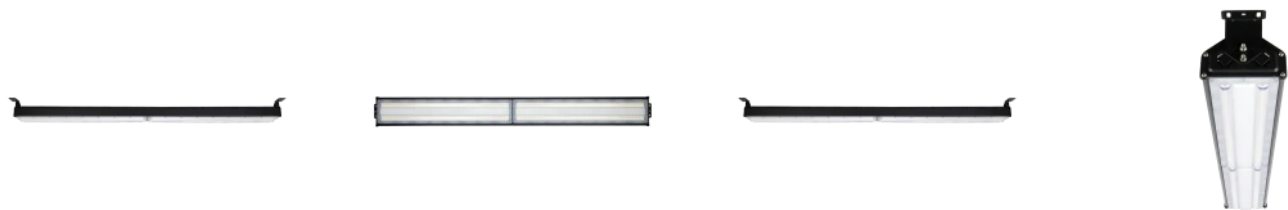


Logistics data




Single packaging

Quantity	1
Width	1076 mm
Height	78 mm
Length	118 mm
Weight	2,62 kg



Bulk packaging

Quantity	5
Width	505 mm
Height	162 mm
Length	1140 mm
Volume	0,093 m3
Weight	16,1 kg



Europallet

Height	1944 mm
Quantity in layer	5
Number of layers	12
Bulk quantity	60
Weight	25 kg

LED line LITE

Code: 206779

EAN: 5905378206779

**LED line LITE HighBay luminaire
STREAKBAY 200W 4000K 20000lm**

Example application