

LED line LITE

Code: 216747

EAN: 5905378216747

**LED NANO T8 G13 6500K 23W 2380lm  
230V 270° 150cm PC LITE**



**Nano Fluorescent Lamp** has been designed with durability, safety, and user convenience in mind. Its housing is made of durable plastic, which means it does not break during transport or installation. The absence of glass elements further minimizes the risk of damage and increases safety, especially in areas prone to impacts, such as warehouses, workshops, schools, or garages.



**Technical data**

Parameter	Value
Energy efficiency class 2019/2015	F
Warranty	2
Power	• 23 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 6500 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
Luminous efficacy	100
Luminous flux	2380 lm
The lumen maintenance factor	96
Lifetime L70B50	18 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	270 °
LED type	SMD2835
LED quantity	96
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
For indoor use	Inside
Length	1500
Weight	0,1 kg
Material	Plastic
Material (housing)	Polycarbonate


LED line LITE

Code: 216747


EAN: 5905378216747

**LED NANO T8 G13 6500K 23W 2380lm  
230V 270° 150cm PC LITE**


**Technical drawing**






**Light distribution**

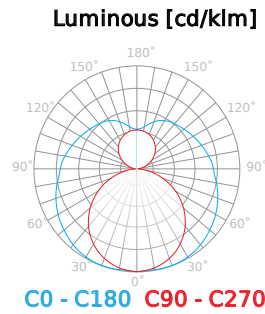

**Additional product photos**

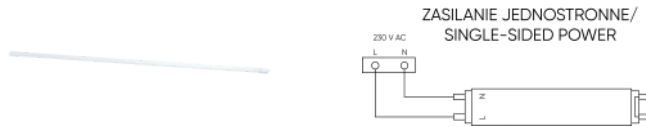

**Logistics data**



**Single packaging**

Quantity	1
Width	36 mm
Height	66 mm
Length	36 mm
Weight	0,11 kg

**Bulk packaging**

Quantity	25
Width	1590 mm
Height	175 mm
Length	170 mm
Volume	
Weight	3,22 kg

**Europallet**

Quantity	600
Height	1590 mm
Quantity in layer	600
Number of layers	1
Bulk quantity	24
Weight	105 kg

LED line LITE

Code: 216747

EAN: 5905378216747

**LED NANO T8 G13 6500K 23W 2380lm  
230V 270° 150cm PC LITE**

**Example application**

