

LED line PRIME

Code: LL-35-24

EAN: 5907777479211

Power Supply 35-24 IP67 36W 24V
PRIME

The PRIME 35-24 IP67 24V LED line power supply is a specialized device with 36W power and 24V output voltage, perfectly adapted for operation in difficult outdoor conditions with IP67 protection class. Its input voltage range ranges from 90 to 264V AC, which provides specialized flexibility in applications. With a high efficiency of 85% and a power factor of 0.95, it guarantees efficient operation and minimizes energy losses.



5
WARRANTY

IP
67

PF
0,95

24V
DC

Technical data

Parameter	Value	Parameter	Value
Warranty	5	Ambient humidity	20 ÷ 90%
Power	• 36 W	Insulation strength	3kVAC
Voltage	• 90-264 V AC	EMC standards	EN55015
IEC protection class	II	Mounting type	surface
Output current range	0 ÷ 1.5A	Inrush current (typ.)	70A / 230VAC
Input voltage frequency range	47 ÷ 63Hz	Ambient temperature suitable for operation	-30÷40
Rated current	1,5A	Length	150 mm
Safety standards	IP67	Width	41 mm
Efficiency	0,85	Height	30 mm
Voltage tolerance	-/+5.0%	Output voltage	• 24 V


LED line PRIME

Code: LL-35-24

EAN: 5907777479211


Power Supply 35-24 IP67 36W 24V
PRIME

Technical drawing






Light distribution

Additional product photos

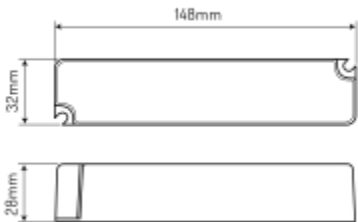

Logistics data



Single packaging

Quantity	1
Width	45 mm
Height	30 mm
Length	165 mm
Weight	0,24 kg

Bulk packaging

Quantity	50
Width	240 mm
Height	260 mm
Length	345 mm
Weight	16,8 kg

Europallet

Quantity	2880
Height	1060 mm
Bulk quantity	36
Weight	748 kg

LED line PRIME

Code: LL-35-24

EAN: 5907777479211

Power Supply 35-24 IP67 36W 24V
PRIME

Example application