

LED line PRIME


Code: 475503

EAN: 5907777475503

LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 90\*110° black



The FUSION 20W LED line PRIME offers exceptional light efficiency of 130 lm/W, generating a total light stream of 2600 lm. It has a colour temperature of 4000 K, which provides neutral, white light. Thanks to IP20 leak class and IK08 protection degree, it is resistant to mechanical damage. Mounted in indoor spaces guarantees a longevity of up to 50,000 hours.

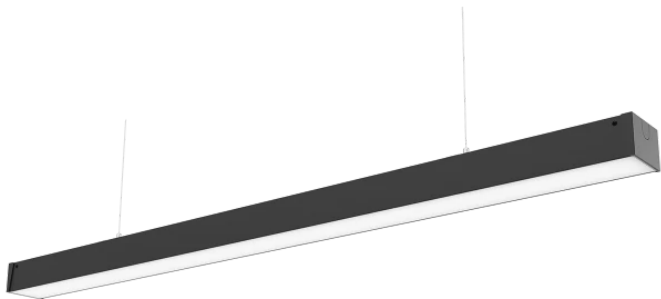

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
IP protection rating	IP20
Luminous efficacy	130
Sling length	200 cm
Standby power	0
Colour consistency in McAdam ellipses	≤6
Luminous flux	2600
Survival factor	0.9
Lifetime L70B50	50 000 h

Parameter	Value
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
The lumen maintenance factor	96
Power Factor	0,9
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
IEC protection class	I
IK protection rating	08
Lamp's warm-up time to 60%	1 s
Length	586
Width	70
Height	52

LED line PRIME

Code: 475503


EAN: 5907777475503

LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 90\*110° black

Technical drawing




Light distribution

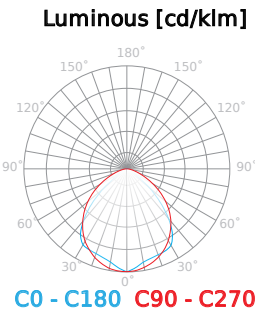

Additional product photos




Logistics data




Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg



Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	



Europallet

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

---

LED line PRIME

Code: 475503

EAN: 5907777475503

**LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 90\*110° black**

---

**Example application**