


LED line PRIME

Code: 476012-DALI

EAN: 5905378221956

Linear luminaire FUSION 4000K 60W
7800lm 120*120° IP20 150cm black
PRIME DALI

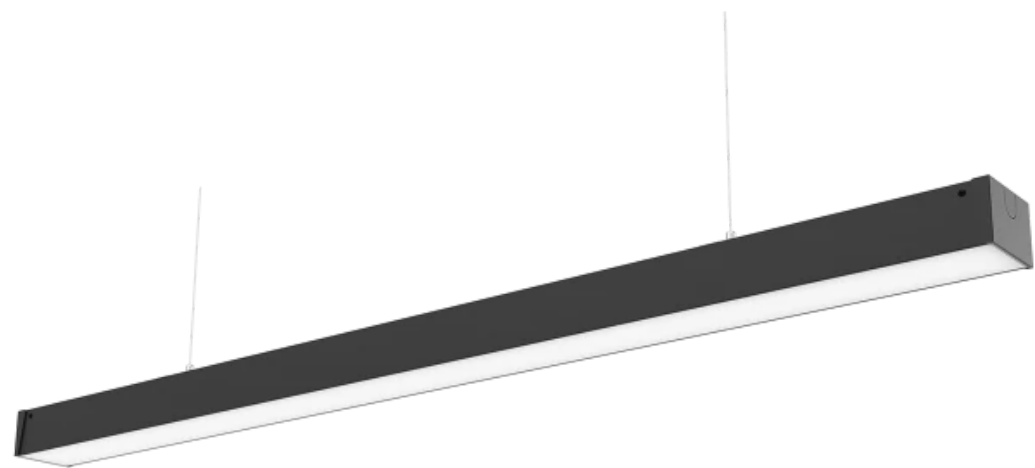

FUSION fixture series is available in power ranges from 20 to 60W, with a color temperature of **4000K**. The efficiency of the fixtures is 130 lm/W.

The length of the fixture varies depending on its power. FUSION fixtures offer different light distribution angles that can be adjusted using lenses, allowing practical adaptation to any lighting arrangement. Optionally, a UGR shield can be used to eliminate the "glare" effect.

DALI version.

Product made to order - delivery within 4 days.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h

Parameter	Value
Dimmable function	Dali
Sling length	200 cm
Frequency of the supply voltage	50/60Hz
Beam angle	120*120°
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Length	1444 mm
Width	70 mm
Height	52 mm
DALI	• YES


LED line PRIME

Code: 476012-DALI

EAN: 5905378221956

Linear luminaire FUSION 4000K 60W
7800lm 120*120° IP20 150cm black
PRIME DALI


Technical drawing



Light distribution


Additional product photos

Logistics data




Single packaging

Width	1444 mm
Height	125 mm
Length	70 mm
Weight	1,97 kg



Bulk packaging

Quantity	12
Width	1550 mm
Height	260 mm
Length	120 mm
Weight	23,89 kg



Europallet

Quantity	144
Height	1820 mm
Bulk quantity	12
Weight	25 kg

LED line PRIME

Code: 476012-DALI

EAN: 5905378221956

**Linear luminaire FUSION 4000K 60W
7800lm 120*120° IP20 150cm black
PRIME DALI**

Example application