


LED line PRIME

Code: 475466-DALI

EAN: 5905378224049

Linear luminaire FUSION 4000K 20W
2600lm 120° IP20 60cm black PRIME PC
Cover DALI

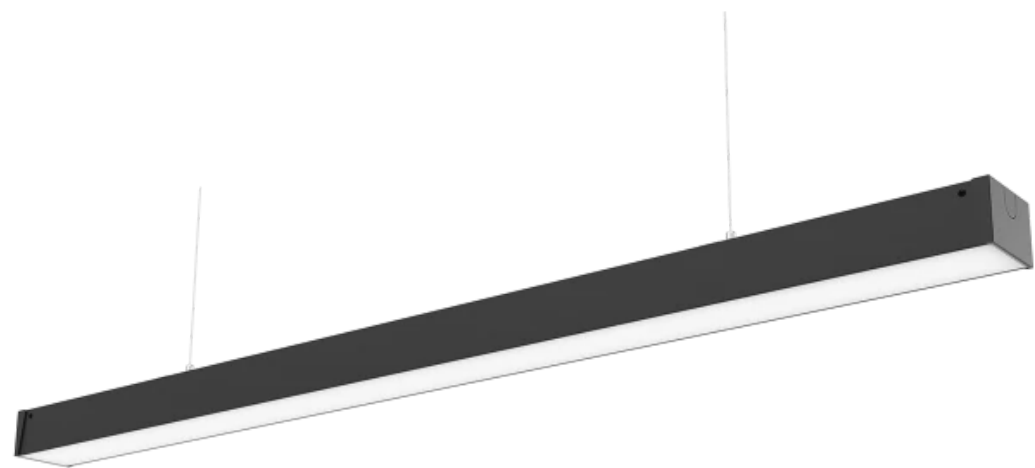

FUSION fixture series is available in power ranges from 20 to 60W, with a color temperature of **4000K**. The efficiency of the fixtures is 130 lm/W.

DALI version.

Product made to order - delivery within 4 days.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h

Parameter	Value
Dimmable function	Dali
Sling length	200 cm
Frequency of the supply voltage	50/60Hz
Beam angle	120°
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Length	586 mm
Width	70 mm
Height	52 mm
DALI	• YES

LED line PRIME

Code: 475466-DALI


EAN: 5905378224049

Linear luminaire FUSION 4000K 20W

2600lm 120° IP20 60cm black PRIME PC

Cover DALI


Technical drawing



Light distribution


Additional product photos

Logistics data




Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg



Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Weight	11,5 kg



Europallet

Quantity	288
Height	1710 mm
Bulk quantity	24
Weight	672 kg

LED line PRIME

Code: 475466-DALI

EAN: 5905378224049

**Linear luminaire FUSION 4000K 20W
2600lm 120° IP20 60cm black PRIME PC
Cover DALI**

Example application