

LED line LITE

Code: 200746

EAN: 5905378200746

**DOWNLIGHT MOLLY 4000K 5W 500lm
round IP20 White LITE**



LED line LITE Downlight MOLLY 5W and 500 lumen light stream is a modern solution in a minimalist style. Equipped with SMD LED technology 2835, it provides excellent light efficiency at 100 lm/W. It offers neutral light temperature 4000K and Ra>80 color rendering, which guarantees natural light effect.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	D
Warranty	3
Power	• 5 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IEC protection class	II
Luminous efficacy	100
Luminous flux	500
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	110
LED type	SMD LED 2835
LED quantity	16
Number of on/off cycles	20000
Ambient temperature suitable for operation	-20÷40
For indoor use	Inside
Mounting hole diameter	75-90
Height	26 mm
Fixture's diameter	95 mm
Weight	0,053 kg
Colour	White
Material (housing)	Polycarbonate


LED line LITE

Code: 200746


EAN: 5905378200746

**DOWNLIGHT MOLLY 4000K 5W 500lm
round IP20 White LITE**


Technical drawing



Light distribution



Additional product photos

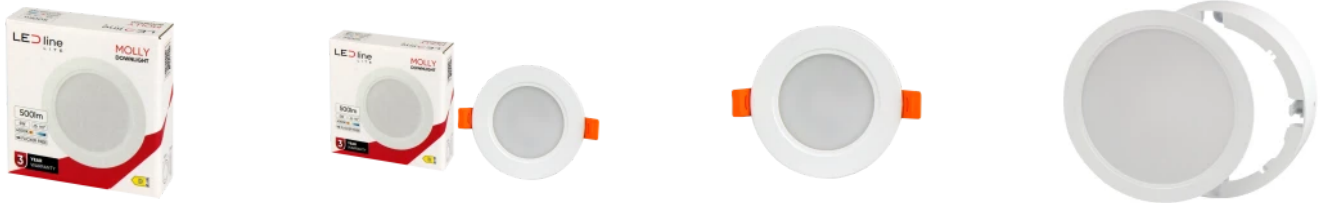

Logistics data



Single packaging

Quantity	1
Width	102 mm
Height	37 mm
Length	100 mm
Weight	0,08 kg

Bulk packaging

Quantity	100
Width	390 mm
Height	220 mm
Length	525 mm
Volume	0,025 m ³
Weight	8,6 kg

Europallet

Quantity	4800
Height	1,80 m
Quantity in layer	600
Number of layers	8
Bulk quantity	48
Weight	443 kg

LED line LITE

Code: 200746

EAN: 5905378200746

**DOWNLIGHT MOLLY 4000K 5W 500lm
round IP20 White LITE**

Example application

