

LED line LITE

Code: 216730

EAN: 5905378216730

**LED line NANO T8 G13 4000K 23W
2380lm 230V 270° 150cm PC LITE**



Nano Fluorescent Lamp has been designed with durability, safety, and user convenience in mind. Its housing is made of durable plastic, which means it does not break during transport or installation. The absence of glass elements further minimizes the risk of damage and increases safety, especially in areas prone to impacts, such as warehouses, workshops, schools, or garages.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	F
Warranty	2
Power	• 23 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
Luminous efficacy	100
Luminous flux	2380 lm
The lumen maintenance factor	96
Lifetime L70B50	18 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Lamp's type	T8
Beam angle	270 °
LED type	SMD2835
LED quantity	96
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
For indoor use	Inside
Length	150 cm
Weight	0,1 kg
Material	Plastic
Material (housing)	Polycarbonate


LED line LITE

Code: 216730


EAN: 5905378216730

**LED line NANO T8 G13 4000K 23W
2380lm 230V 270° 150cm PC LITE**


Technical drawing






Light distribution

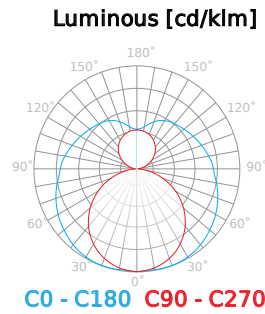

Additional product photos

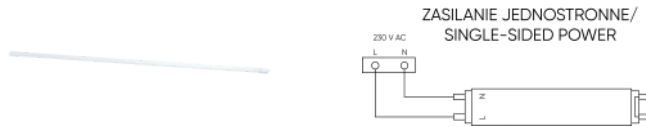

Logistics data



Single packaging

Quantity	1
Width	46 mm
Height	76 mm
Length	46 mm
Weight	0,11 kg

Bulk packaging

Quantity	25
Width	1590 mm
Height	175 mm
Length	170 mm
Volume	
Weight	3,22 kg

Europallet

Quantity	600
Height	1590 mm
Quantity in layer	600
Number of layers	1
Bulk quantity	600
Weight	105 kg

LED line LITE

Code: 216730

EAN: 5905378216730

**LED line NANO T8 G13 4000K 23W
2380lm 230V 270° 150cm PC LITE**

Example application

