

LED line PRIME

Code: LL-150-24

EAN: 5907777479273

Power Supply 150-24 IP67 150W 24V
PRIME

The PRIME 150-24 IP67 LED line power supply is a reliable device with a maximum output capacity of 144 W, providing stable power supply in LED systems. It offers an output voltage of 24 V and rated current of up to 6 A. It works in a wide input voltage range from 180 to 277 V AC and a frequency of 47 ÷ 63 Hz. Thanks to the IP67 protection class, the power supply is resistant to dust and water, making it ideal for both internal and external applications.



5
WARRANTY

IP
67

PF
0,95

24V
DC

MAX
-30÷70°C

Technical data

Parameter	Value
Warranty	5
Power	• 150 W
Voltage	• 220-240 V AC
IP protection rating	IP67
IEC protection class	II
Output current range	0 ÷ 6,25 A
Input voltage frequency range	50 ÷ 60Hz
Rated current	0,69
Safety standards	IP67
Efficiency	0,89
Voltage tolerance	-/+5.0%
Ambient humidity	20 ÷ 90%

Parameter	Value
Insulation strength	3kVAC
EMC standards	EN55015
Mounting type	surface
Inrush current (typ.)	50A/230VAC
Power Factor	>=0,95
Ambient temperature suitable for operation	-30÷50
Length	200 mm
Width	60 mm
Height	40 mm
Weight	0,68 kg
Output voltage	• 24 V


LED line PRIME

Code: LL-150-24

EAN: 5907777479273


Power Supply 150-24 IP67 150W 24V
PRIME

Technical drawing






Light distribution

Additional product photos

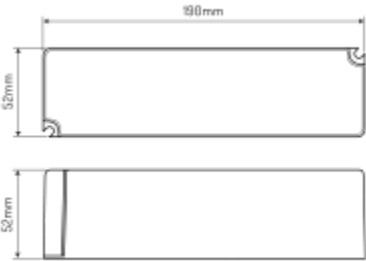

Logistics data



Single packaging

Quantity	1
Width	85 mm
Height	55 mm
Length	280 mm
Weight	1,14 kg

Bulk packaging

Quantity	30
Width	205 mm
Height	230 mm
Length	425 mm
Weight	22,3 kg

Europallet

Quantity	480
Height	1,90 m
Quantity in layer	120
Number of layers	4
Bulk quantity	32
Weight	1363 kg

LED line PRIME

Code: LL-150-24

EAN: 5907777479273

Power Supply 150-24 IP67 150W 24V
PRIME

Example application