

LED line LITE


Code: 207486

EAN: 5905378207486

Park luminaire PARKLITE 3CCT(3/4/6K)
50W 6000lm IP65 black LITE



The PARKLITE 50W CCT 6000lm park fixture in black is an innovative light source with a power of 50 W. Equipped with SMD LED 2835 diodes, it provides high luminous efficiency at a level of 120 lm/W, generating a total luminous flux of 6000 lumens. It features an energy efficiency class of E and a power factor PF of 0.9. The fixture has an IP65 protection rating and IK08, ensuring resistance to weather conditions and mechanical damage.




Technical data


Parameter	Value	Parameter	Value
Energy efficiency class 2019/2015	E	Colour consistency in McAdam ellipses	≤6
Warranty	3	ULOR	2,3 %
Power	• 50 W	Wire length	400 mm
Voltage	• 220-240 V AC	Frequency of the supply voltage	50/60Hz
Correlated colour temperature	• 3000 K • 4000 K • 6000 K	Beam angle	100
Colour of the light	White	LED type	SMD LED 2835
Colour rendering index Ra	80	LED quantity	384
IP protection rating	IP65	Power Factor	0,9
IK protection rating	08	Lamp's warm-up time to 60%	1
IEC protection class	I	Ambient temperature suitable for operation	-30÷50
Luminous efficacy	120	Height	117
Luminous flux	6000	Weight	2190
The lumen maintenance factor	96	Material (housing)	Aluminium
Lifetime L70B50	25 000 h	Material (cover)	Tempered glass
Survival factor	0.9		

Park luminaire PARKLITE 3CCT(3/4/6K)
50W 6000lm IP65 black LITE


Technical drawing




Light distribution



Additional product photos

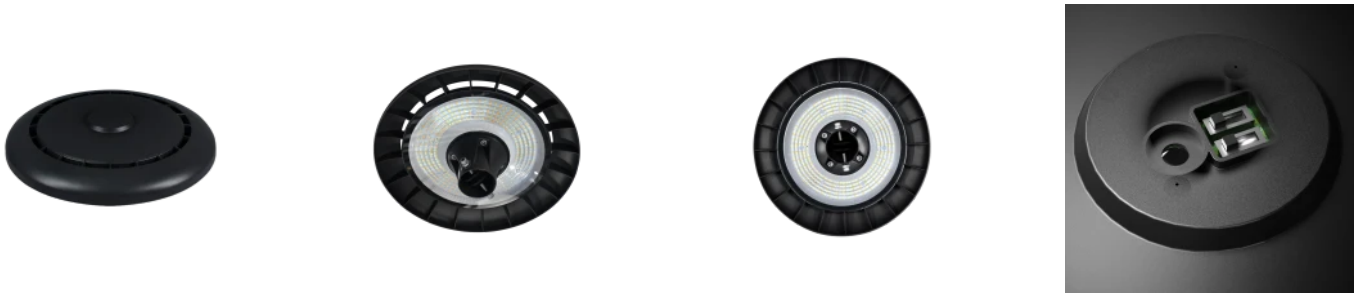


Logistics data




Single packaging

Width	420 mm
Height	135 mm
Length	425 mm
Weight	2,25 kg



Bulk packaging

Quantity	4
Width	445 mm
Height	430 mm
Length	550 mm
Volume	0,105 m3
Weight	9,3 kg



Europallet

Height	1780 mm
Quantity in layer	8
Number of layers	4
Bulk quantity	32
Weight	74,4 kg

LED line LITE

Code: 207486

EAN: 5905378207486

**Park luminaire PARKLITE 3CCT(3/4/6K)
50W 6000lm IP65 black LITE**

Example application

