

LED line LITE


Code: 227323

EAN: 5905378227323

**Solar facade light mesh SUNLIS 3000K
300lm IP65 black LITE**

New

The SUNLIS LITE solar fixture is an intelligent facade lighting solution that communicates wirelessly – motion detection by one lamp automatically activates the light in all connected devices, increasing visibility and safety. It emits warm light at 3000K with a power of 300lm, perfectly highlighting the charm of the garden and facade without the need for electrical installation. With advanced energy management and an IP65 rating, the lamp guarantees efficient operation throughout the night and full resistance to weather conditions.

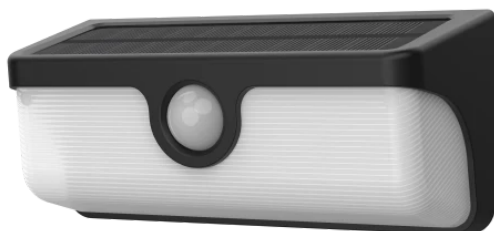

Technical data

Parameter	Value
Warranty	3
Correlated colour temperature	• 3000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP65
IK protection rating	03
IEC protection class	III
Luminous flux	300
Loading time	8 h
Photo cell power	7W

Parameter	Value
Type of battery	Li-ion 2000mAh 3.7V MR18650
Beam angle	120°
Ambient temperature suitable for operation	-20 ÷ 45
For indoor use	Outside
Length	169 mm
Width	75 mm
Height	60 mm
Weight	0,265 kg
Battery life	8 h


LED line LITE

Code: 227323

EAN: 5905378227323

**Solar facade light mesh SUNLIS 3000K
300lm IP65 black LITE**

Technical drawing



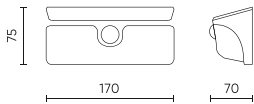


Light distribution

Additional product photos



Logistics data



Single packaging

Width	75 mm
Height	190 mm
Length	85 mm
Weight	0,328 kg

Bulk packaging

Quantity	36
Width	470 mm
Height	215 mm
Length	535 mm
Weight	13,17 kg

Europallet

Quantity	648
Height	1,7 m
Bulk quantity	18
Weight	270 kg

LED line LITE

Code: 227323

EAN: 5905378227323

**Solar facade light mesh SUNLIS 3000K
300lm IP65 black LITE**

Example application