

LED line LITE

Code: 202856

EAN: 5905378202856

**DOWNLIGHT EASY FIX PRO
3CCT(3K/4K/5K) 24W 2400lm round
IP20 White LITE**



24W LED line ceiling panel LITE EASY FIX PRO generates 2400 lm light stream, offering the possibility to adjust the colour temperature from 3000K to 5000K. The built-in linear power supply saves space and simplifies installation. Thanks to the design that allows both methods of installation – plaster and plaster – the panel fits perfectly into modern interior arrangements.




Technical data

Parameter	Value
Energy efficiency class 2019/2015	E
Warranty	3
Power	• 24 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 3000 K • 4000 K • 5000 K
Colour of the light	White
Colour rendering index Ra	85
IP protection rating	IP20
IK protection rating	05
IEC protection class	II
Luminous efficacy	100
Luminous flux	2400
The lumen maintenance factor	96
Lifetime L70B50	25 000 h
Survival factor	0,9
Dimmable function	PWM


Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Fixture's diameter	292 mm
Beam angle	110
LED type	SMD2835
LED quantity	224
Power Factor	0,7
Number of on/off cycles	20000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷40
For indoor use	Inside
Mounting hole diameter	60-250
Height	19,5
Weight	750
Colour	White
Material (cover)	Polycarbonate

DOWNLIGHT EASY FIX PRO
3CCT(3K/4K/5K) 24W 2400lm round
IP20 White LITE


Technical drawing






Light distribution



Additional product photos

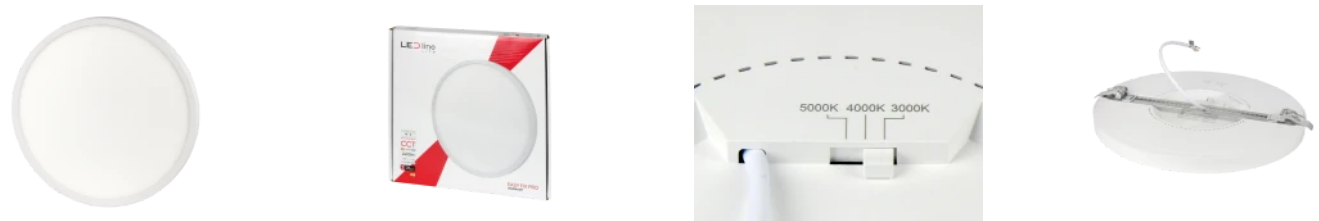

Logistics data



Single packaging

Quantity	1
Width	306 mm
Height	40 mm
Length	296 mm
Weight	0,8 kg

Bulk packaging

Quantity	10
Width	327 mm
Height	315 mm
Length	432 mm
Volume	0,044 m3
Weight	10 kg
Comments	

Europallet

Quantity	240
Height	1,90 m
Quantity in layer	60
Number of layers	4
Bulk quantity	24
Weight	265 kg

LED line LITE

Code: 202856

EAN: 5905378202856

**DOWNLIGHT EASY FIX PRO
3CCT(3K/4K/5K) 24W 2400lm round
IP20 White LITE**

Example application