

LED line PRIME

Code: 204003

EAN: 5905378204003

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 90*110° white



The 20W LED line FUSION PRIME linear luminaire and light color 4000K generates a light stream of 2600 lm. The use of long-lived LEDs ensures light efficiency of 130 lm/W, which contributes to energy savings. The angle of light distribution is 90x110° and the IP20 leak class guarantees safety of indoor use.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
IP protection rating	IP20
Luminous efficacy	130
Sling length	200 cm
Standby power	2600
Colour consistency in McAdam ellipses	≤6
Luminous flux	2600
Survival factor	0.9
Lifetime L70B50	50 000 h

Parameter	Value
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
The lumen maintenance factor	96
Power Factor	0,9
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
IEC protection class	I
IK protection rating	08
Lamp's warm-up time to 60%	1 s
Length	586
Width	70
Height	52

LED line PRIME

Code: 204003


EAN: 5905378204003

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 90*110° white




Technical drawing

Light distribution

Additional product photos

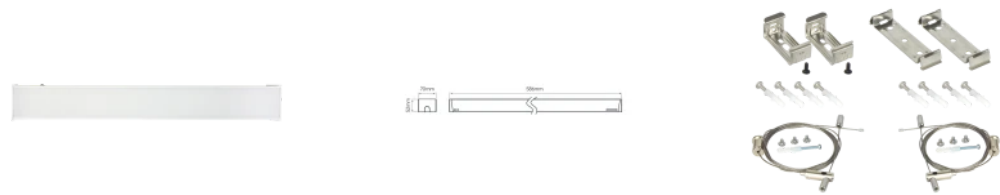

Logistics data



Single packaging

Width	586 mm
Height	35 mm
Length	70 mm
Weight	1,14 kg

Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	120 mm
Volume	0,021 m3
Weight	13,93 kg
Comments	

Europallet

Quantity	288
Height	1820 mm
Quantity in layer	48
Number of layers	7
Bulk quantity	336
Weight	415,04 kg

LED line PRIME

Code: 204003

EAN: 5905378204003

**LED line PRIME FUSION linear lamp
20W 4000K 2600lm 90*110° white**

Example application