


LED line LITE

Code: 209978

EAN: 5905378209978

LED line LITE Downlight EASY FLEX
18W CCT 1530lm round white with
motion sensor

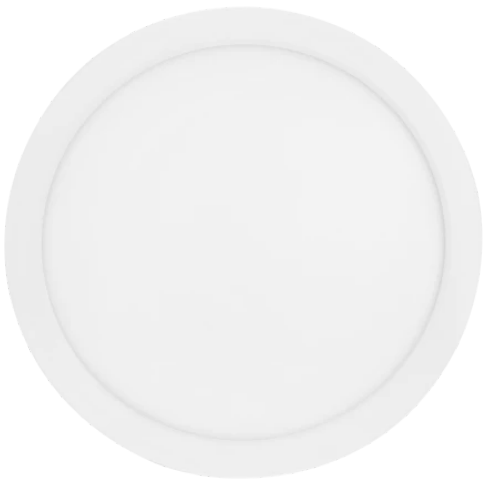

New

Downlight EASY FLEX 18W CCT is a modern lighting setting, characterized by an elegant round shape and white finish. It emits a total luminous flux of 1530 lm at 85 lm/W. Thanks to the function of changing the temperature of light (3000 K, 4000 K, 5000 K) it provides flexibility to adjust the atmosphere to the needs of the user.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	E
Warranty	3
Power	• 18 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 3000 K • 4000 K • 5000 K
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	05
IEC protection class	II
Luminous efficacy	85
Luminous flux	1530
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Fixture's diameter	225
Beam angle	120
LED type	SMD2835
LED quantity	86
Number of on/off cycles	15000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20 ÷ 40
Installation method	3in1 surface mounted, flush mounted, suspended
Mounting hole diameter	65-180
Height	17
Weight	360
Colour	White


LED line LITE

Code: 209978


EAN: 5905378209978

LED line LITE Downlight EASY FLEX
18W CCT 1530lm round white with
motion sensor

Technical drawing




Light distribution



Additional product photos




Logistics data




Single packaging

Width	31 mm
Height	230 mm
Length	230 mm
Weight	0,36 kg



Bulk packaging

Quantity	20
Width	335 mm
Height	255 mm
Length	480 mm
Weight	9,52 kg



Europallet

Bulk quantity	480
---------------	-----

LED line LITE

Code: 209978

EAN: 5905378209978

**LED line LITE Downlight EASY FLEX
18W CCT 1530lm round white with
motion sensor**

Example application