

LED line PRIME

Code: 204331

EAN: 5905378204331

**Linear luminaire FUSION 4000K 60W  
7800lm P18° IP20 150cm white PRIME 0-10V**



The FUSION 60W LED line PRIME is characterized by high performance, generating a 7800 lm light stream at 4000 K colour temperature. Its effectiveness is 130 lm/W, providing effective lighting. It is characterized by the possibility of regulating brightness in the range 0-10 V and impact resistance IK08 and IP20 leak class. The aluminum used effectively drains heat, which prolongs product life to 50,000 hours.



**Technical data**

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 204331

EAN: 5905378204331


**Linear luminaire FUSION 4000K 60W  
7800lm P18° IP20 150cm white PRIME 0-10V**

**Technical drawing**






**Light distribution**

**Additional product photos**

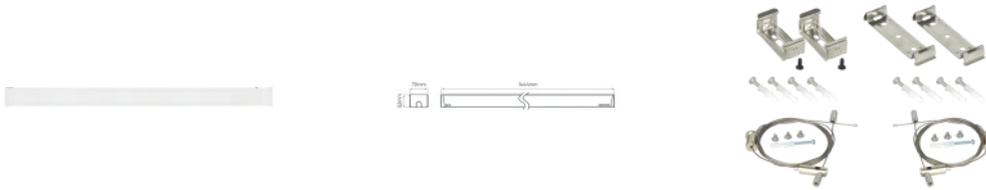

**Logistics data**



**Single packaging**

Width	1444 mm
Height	31 mm
Length	70 mm
Weight	1,97 kg

**Bulk packaging**

Quantity	12
Width	1550 mm
Height	260 mm
Length	120 mm
Volume	0,048 m3
Weight	23,89 kg
Comments	

**Europallet**

Quantity	144
Height	1820 mm
Quantity in layer	12
Number of layers	7
Bulk quantity	12
Weight	25 kg

---

LED line PRIME

Code: 204331

EAN: 5905378204331

**Linear luminaire FUSION 4000K 60W  
7800lm P18° IP20 150cm white PRIME 0-  
10V**

---

**Example application**