


LED line® SMD 5W 6500K 400lm 220-260V 50mm DIM



Manufacturer issues a 3-year warranty for this product.

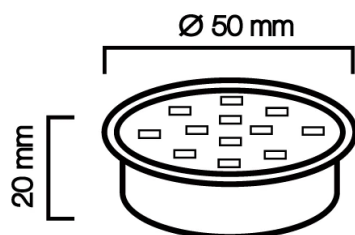

The slim design gives the product a modern minimalist appearance and can be installed in limited space.



The power supply system used allows for smooth adjustment of light intensity using an appropriate dimmer.



Voltage range and voltage type



LED type



Flicker Free



The structural design of this product ensures effective heat dissipation.



Beam angle




Ambient temperature suitable for operation




Lifespan

Parameter	Value
Luminous efficacy	80 lm/W
Power	5 W
Colour of the light	White
Energy efficiency class 2019/2015	G
Luminous flux	400 lm
Correlated colour temperature	6500 K
Colour consistency in McAdam ellipses	≤6
Warranty (years)	3
Dimmable function	Triac
Survival factor	0.9
Lifetime L70B50	30 000
Supply voltage range and voltage type	220-260 VAC
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	White
The lumen maintenance factor	96 %

Parameter	Value
Lamp's diameter	50
Beam angle	110 °
Material (cover)	glass
Material (housing)	Ceramic
LED type	SMD2835
Compatible dimmer type	TRIAC
Lifespan	30000
Power Factor	0,4
Number of on/off cycles	50000
Colour consistency in McAdam ellipses	≤6
Ambient temperature suitable for operation	-5+40 °C
For indoor use	Inside
IEC protection class	II
Height	22 mm
Product weight with packaging	59 g
Energy class	A+

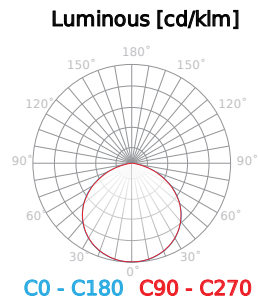


Single packaging




Width	22 mm
Height	22 mm
Length	70,5 mm
Weight	0,08 kg
	10

Bulk packaging



Number of pieces/tape in meters pack zb	100 szt.
Width	610 mm
Height of collective packaging	235 mm
Length	150 mm
Weight	7 kg
Volume	0,021 m ³

Europallet



Number of pieces/tapes in meters euro pallet	4500
Quantity collective euro pallet	6400 szt.
Weight of a euro pallet	448 kg
Pallet height	1880 mm
Quantity in 1 layer	800 szt.
Number of layers	8