

LED line PRIME


Code: 475831

EAN: 5907777475831

**Linear luminaire FUSION 4000K 40W
5200lm 120° IP20 120cm black PRIME PC
Cover 0-10V**



FUSION LED line PRIME linear luminaire 40W and 4000K colour temperature provides a light stream of 5200 lm. Thanks to 130 lm/W efficiency and 120° light distribution angle, the holder guarantees uniform lighting. It is characterized by a solid aluminium body, which promotes effective heat discharge and prolongs its lifespan.

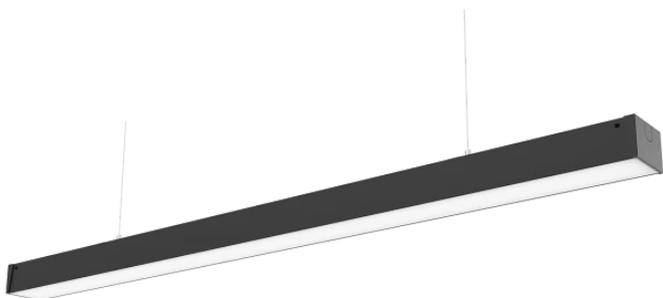

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	5200
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
L80B* - difference B10-B50 ≈ 1% (according to LightingEurope) - negligible	35000 h
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 475831


EAN: 5907777475831

**Linear luminaire FUSION 4000K 40W
5200lm 120° IP20 120cm black PRIME PC
Cover 0-10V**

Technical drawing






Light distribution

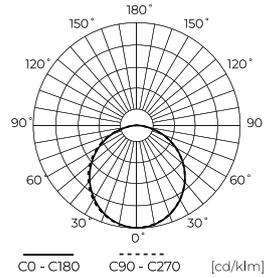

Additional product photos



Logistics data



Single packaging

Width	1158 mm
Height	39 mm
Length	70 mm
Weight	1,82 kg

Bulk packaging

Quantity	12
Width	1260 mm
Height	260 mm
Length	120 mm
Volume	0,039 m3
Weight	22,09 kg
Comments	

Europallet

Quantity	144
Height	1820 mm
Quantity in layer	12
Number of layers	7
Bulk quantity	12
Weight	25 kg

LED line PRIME

Code: 475831

EAN: 5907777475831

**Linear luminaire FUSION 4000K 40W
5200lm 120° IP20 120cm black PRIME PC
Cover 0-10V**

Example application