

LED line LITE


Code: 209985

EAN: 5905378209985

**LED line LITE Downlight EASY FLEX
24W 4000K 2110lm round white**



Downlight EASY FLEX 24W 4000K is a modern LED lighting with high performance and elegant round shape. It emits a luminous flux of 2110 lumens at a colour temperature of 4000 K, which provides neutral light ideal for different spaces. The product achieves a colour reproduction coefficient of Ra at level 80 and energy efficiency E. It is impact resistant (IK05) and has IP20 leak class.

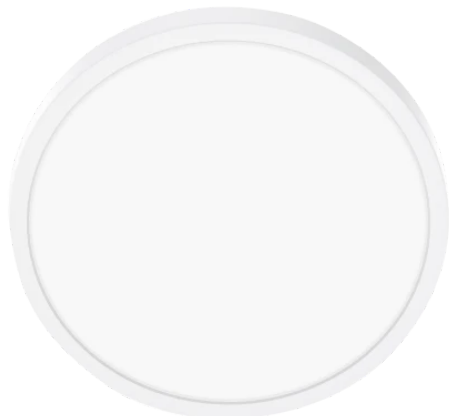

Technical data

Parameter	Value
Voltage	• 220-240 V AC
Luminous efficacy	88
Energy efficiency class 2019/2015	E
Luminous flux	2110
Colour consistency in McAdam ellipses	≤6
Warranty (years)	3
IP protection rating	IP20
Survival factor	0.9
Lifetime L70B50	30 000 h
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	White
The lumen maintenance factor	96

Parameter	Value
Fixture's diameter	300
Beam angle	120
LED type	SMD2835
LED quantity	84
Number of on/off cycles	15000
Colour consistency in McAdam ellipses	≤6
Ambient temperature suitable for operation	-20 ÷ 40
Mounting hole diameter	65-240
IEC protection class	II
IK protection rating	05
Lamp's warm-up time to 60%	1 s
Correlated colour temperature	• 4000 K
Power	• 24 W

LED line LITE


Code: 209985

EAN: 5905378209985

**LED line LITE Downlight EASY FLEX
24W 4000K 2110lm round white**

Technical drawing


Light distribution




Additional product photos




Logistics data



Single packaging



Bulk packaging



Europallet

LED line LITE

Code: 209985

EAN: 5905378209985

**LED line LITE Downlight EASY FLEX
24W 4000K 2110lm round white**

Example application