

LED line PRIME

Code: 200180-CAW3HAT

EAN: 5905378219960

Backlit Panel 4000K 40W 4800lm  
60x60cm white PRIME emergency  
module CAW 3h AT CNBOP



The 40 W Backlit PRIME panel and 4800 lm light stream are a perfect solution for modern interiors. Its neutral colour of light 4000 K provides pleasant lighting, and a wide lighting angle of 120° guarantees uniform distribution of light. The product is equipped with an automatic emergency module that runs for 3 hours.



Technical data

| Parameter                             | Value          |
|---------------------------------------|----------------|
| Energy efficiency class 2019/2015     | E              |
| Warranty                              | 5              |
| Power                                 | • 40 W         |
| Voltage                               | • 220-240 V AC |
| Correlated colour temperature         | • 4000 K       |
| Colour of the light                   | White          |
| Colour rendering index Ra             | 80             |
| IP protection rating                  | IP20           |
| IK protection rating                  | 02             |
| IEC protection class                  | II             |
| Luminous efficacy                     | 120            |
| Luminous flux                         | 4800           |
| The lumen maintenance factor          | 96             |
| Lifetime L70B50                       | 75 000 h       |
| Survival factor                       | 0.9            |
| Dimmable function                     | PWM            |
| Colour consistency in McAdam ellipses | ≤6             |

| Parameter                                  | Value        |
|--------------------------------------------|--------------|
| Emergency module test                      | Autotest     |
| Operating time in emergency mode           | 3 h          |
| Frequency of the supply voltage            | 50/60Hz      |
| Beam angle                                 | 120          |
| LED type                                   | SMD LED 2835 |
| LED quantity                               | 48           |
| Power Factor                               | 0,9          |
| Number of on/off cycles                    | 25000        |
| Lamp's warm-up time to 60%                 | 1            |
| Ambient temperature suitable for operation | -25÷45       |
| For indoor use                             | Inside       |
| Height                                     | 28 mm        |
| Colour                                     | white        |
| Material (housing)                         | Aluminium    |
| Material (cover)                           | Polystyrene  |
| Emergency module                           | • YES        |

LED line PRIME

Code: 200180-CAW3HAT



EAN: 5905378219960

Backlit Panel 4000K 40W 4800lm  
60x60cm white PRIME emergency  
module CAW 3h AT CNBOP


Technical drawing

Light distribution

Additional product photos

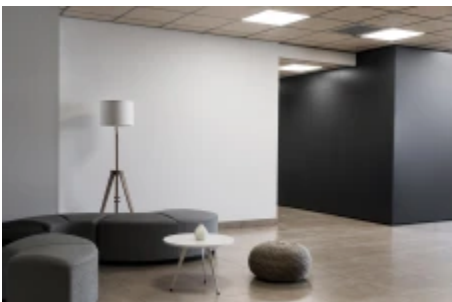


Logistics data




Single packaging

|          |         |
|----------|---------|
| Quantity | 1       |
| Width    | 605 mm  |
| Height   | 30 mm   |
| Length   | 645 mm  |
| Weight   | 1,65 kg |

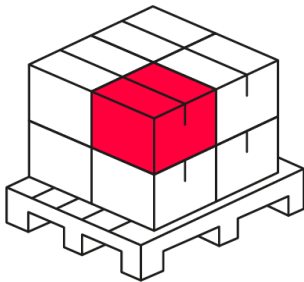

Bulk packaging

|          |          |
|----------|----------|
| Quantity | 5        |
| Width    | 630 mm   |
| Height   | 200 mm   |
| Length   | 670 mm   |
| Volume   | 0,084 m3 |
| Weight   | 11,2 kg  |
| Comments |          |

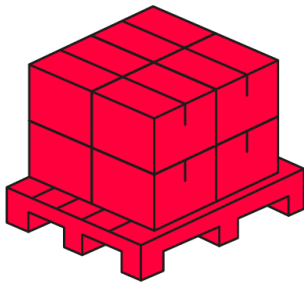

Europallet

|               |         |
|---------------|---------|
| Quantity      | 80      |
| Height        | 1880 mm |
| Bulk quantity | 16      |
| Weight        | 180 kg  |

LED line PRIME

Code: 200180-CAW3HAT

EAN: 5905378219960

**Backlit Panel 4000K 40W 4800lm  
60x60cm white PRIME emergency  
module CAW 3h AT CNBOP**

**Example application**

